



PARTICLE & GAS REUSABLE MASK
...easy connection multiple protection



Gas filter 1031 A2 (bayonet)

ref: OXY-1031-02



EUROPEAN
PRODUCT



Made in
Poland

1031 A2 gas filters, when assembled with the appropriate OXYLINE X1000 or OXYLINE X1200 two-filter half mask, protect the respiratory system against vapours and organic gases whose boiling point is higher than 65°C, if total volumetric concentration not exceeds 0.5%.

Class 2: Medium capacity, max gas concentration: 5000 ppm (0,5%)

Recommendations

1031 A2 gas filters are designed to provide against the following substances: aldehydes; alcohols; benzene; gasoline; acetic anhydride, bromides: ethyl and methyl; chlorides: allyl, butyl, ethylene, isopropyl, vinyl; chlorobenzene, chloroform, cyclohexane, cyclohexanol, cyclohexanone, cyclohexene, carbon tetrachloride, tetrachloroethane, tetrachloroethylene, dioxane, dibromomethane, dichlorobenzene, dichloroethane, dichloronitroethane, dichloropropane, diethyl ketone, di-propyl ketone, epichlorohydrin, esters, ethers, ethylbenzene, freon, heptane, methyl glycol, camphor, xylene, acetic acid, lysol, mercaptans, methylbutyl ketone, urea, kerosene, naphthalene, nicotine, nitrobenzene, nitroglycerin, nitropropane, nitrotoluene, amyl acetate, ethyl acetate, vinyl acetate, ozone, styrene, turpentine, tetralin, tetrahydrofuran, thiophene, mesityl oxide, toluene, trichloromethane, trichlorethylene and vapours of asphalt, tar, varnish and other fumes.

Restrictions on the use

1031 A2 gas filters must not be used if air oxygen content is below 17% vol. and in confined spaces of small cubature.

NOTE: Half masks and masks assembled with 1031 A2 gas filters do not protect against carbon monoxide. Do not use half masks with gas filters near fires.

System easy connection for extensive protection

It is possible to combine with each other, filters and absorbers in any sets..



Absorbers

+




Filters

=



Combination

Gas & Particle
1031 A2 + 1011 P1 R
1031 A2 + 1012 P2 R
1031 A2 + 1013 P3 R
...easy connection multiple protection

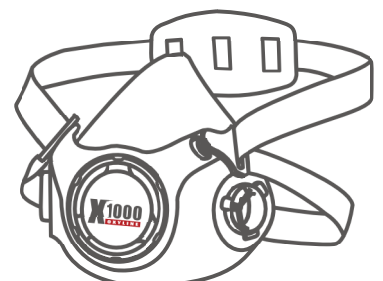

CE 1437



PARTICLE & GAS REUSABLE MASK
...easy connection multiple protection



Gas filter 1031 A2 (bayonet)

ref: OXY-1031-02

Materials:

1. Input: Activated Carbon
2. Casing: ABS

Storage

Gas filters should be stored in dry rooms, free of harmful vapours and gases, where temperature is maintained from -5 to +40 °C and relative humidity is below 80%. Gas filters should not be stored together with the substances that release unpleasant odours, as well as the substances that are toxic and aggressive to the materials from which the gas filters are made.

Shelf life

Guaranteed time for safe storage of tightly packed gas filters (original factory packaging) is 5 years from the production date.

Packing:

The gas filter is packed in a box: 2 pcs
Net weight of 1 pc: 134g
24 box in a 1 carton

Producer:

Oxyline Sp. z o.o.
ul. Piłsudskiego 23, 95-200 Pabianice POLAND

Notified body:

Central Institute for Labour Protection National Research Institute
ul. Czerniakowska 16, 00-701 Warszawa, POLAND

Certyfikacja:

Zgodne z EN14387:2004+A1:2008
Dyrektywa PPE 89/686/EAC

Remember Read Manual



oxy
line

pochłaniacz
gas filter
EN 14387:2004 + A1:2008

1031 A2

Chrom steel
Dopuszczalne
Waża 134g
Waża 134g
Waża 134g
Waża 134g

