




TECHNICAL SHEET FA 60 207 00

ANCHOR PLATE FOR CLAMPING WITH COUNTER PLATE FOR HORIZONTAL WIRE ROPE LIFELINE

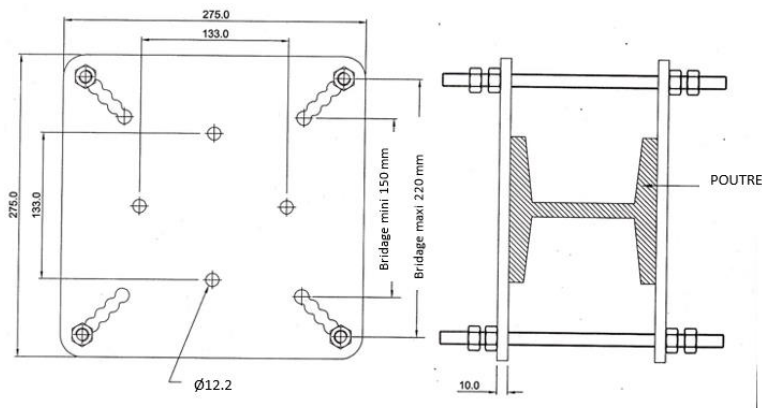

Designed to be installed on a beam by clamping, horizontally or vertically.

Compatible with the Stainless steel extremity plate FA 60 201 00.

Dimensions:

- **Length:** 275 mm
- **Width:** 275 mm

Allowed beam width:

- **Minimum clamping:** 150 mm
- **Maximum clamping:** 220 mm

Hardware:

- 4 pcs. of M12 threaded studs, length 350 mm,
- 2 screws CSK M12x45, 2 Nylock nuts and 2 washers for fixing the extremity plate.

Compliance: EN 795:2012 Type A

Static strength > 12 kN

Breaking strength > 26 kN

Material:

Galvanized steel

CE	Poids
	12.5 kg

KRATOS SAFETY
689, Chemin du Buclay
38540 HEYRIEUX (France) – FRANCE

Tel. : +33 (0)4 72 48 78 27
Fax. : +33 (0)4 72 48 58 32

www.kratossafety.com / info@kratossafety.com

HS CODE
DIMENSIONS CARTON / UC
39 x28 x 14 / 2
Produit testé chez DOLOMITICERT
DolomitiCert Scarl
Zona Industriale Villanova – 32013 LONGARONE
Test report 151016 – Against EN795 : 2012
Test report 1510107 – Against CEN/TS 16415 : 2013