


TECHNICAL SHEET FA 60 211 50

Galvanized steel rigid post, height 500 mm

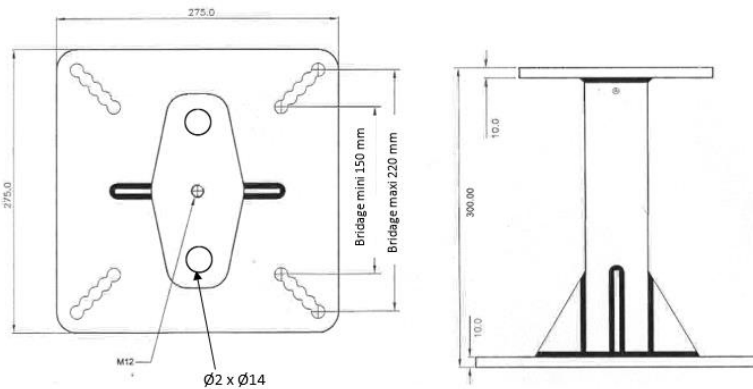

Rigid post for lifeline, designed to be installed as an extremity point, an intermediate point or an angle. Can be installed by clamping on a beam, by clamping on a metal beam or by chemical fixing in concrete through 4 pcs. of stainless steel M12 threaded studs. Compatible with the intermediate bracket FA 60 204 00 and the extremity plate FA 60 201 00.

Dimensions:

- **Height:** 500 mm
- **Width:** 275 mm

Minimum clamping: 150 mm

Maximum clamping: 220 mm

Hardware:

- 2 CSK M12x45 screws, 2 Nylock nuts and 2 washers for fixing the extremity plate.
- 1 pc. of M12x30 hexagonal head bolt for fixing the intermediate bracket.

Breaking strength > 26 kN

Material:

Galvanized steel

	Weight:
	12.52 kg

KRATOS SAFETY
689, Chemin du Buclay
38540 HEYRIEUX (France) – FRANCE

Tel. : +33 (0)4 72 48 78 27
Fax. : +33 (0)4 72 48 58 32

www.kratossafety.com / info@kratossafety.com

HS CODE

CARTON SIZE / PCS.

39 x 28 x 14 / 1

Product tested at DOLOMITICERT

DolomitiCert Scarl

Zona Industriale Villanova – 32013 LONGARONE

Test report 151016 – Against EN795 : 2012

Test report 1510107 – Against CEN/TS 16415 : 2013