


KARIBA




4x integrated pulleys


4x EN 795



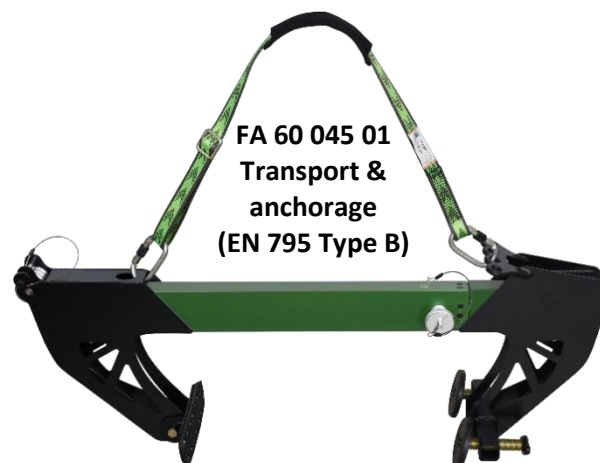



2 USERS

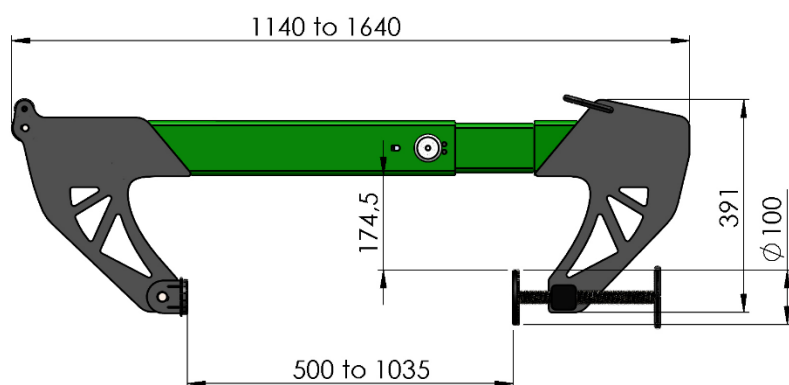

FA 60 045 01
Transport &
anchorage
(EN 795 Type B)



HS CODE
76169990
CARTON SIZE / PCS.
114 x 30,5 x 44 cm / 1
AET (UE) N°2777/24937-01/E01-01
Satra Technology Europe Ltd., N° 2777 Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland


REF.	FA 60 045 00
CE	EN 795:2012 Type B EN 16415:2013 Type B
	x2
MAT.	
DIM.	820 x 155 x 150 mm
R (kN) / MBS (kN)	12 kN / ---
	0.44 m → 1.05 m
+	Integrated transport handle
	17.4 KG



Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture (en kN)
Static strength (in kN) / Minimum Breaking Strength (in kN)
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)



Dimensions de la structure d'accueil
Dimensions of the receiving structure
Dimensiones de la estructura receptora
Dimensioni della struttura ospitante
Abmessungen der Aufnahmestruktur