




TECHNICAL SHEET FA 20 400 10A

WIRE ROPE RETRACTABLE FALL ARRESTER, LENGTH 10 M

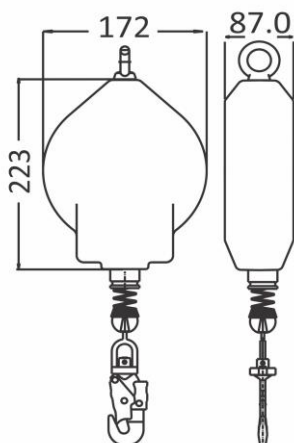

II 2 G c T6

- Comes with Galvanized Steel Wire Rope of diam. 4.8 mm.
- Casing made up of high impact strength Polymer, to prevent breakage.
- Handle with special grip for a perfect comfort during carrying.
- Swivel at the top and at the bottom of the device.
- Internal braking mechanism to reduce the fall arrest force to less than 6kN.

Minimum breaking strength > 12 kN.

Connectors : 1 screw-locking karabiner, opening 22 mm, FA 50 103 22, at anchorage end and 1 steel swivel snap hook with load indicator, opening 20 mm FA 50 203 20.

Maxi weight for horizontal use : 100 kg.

Maxi weight for vertical use : 140 kg.

Compliance : Complies to EN 360:2002, EN 13463-1:2009, EN 13463-5:2003, EN 1149-1:2006 (Surface resistivity) & ATEX Directive 94/9/EC.

Material of components :

Protective casing: PA 6 30% fiberglass

Wire rope: Galvanized steel

Connectors: Steel (FA 50 203 20), Aluminium (FA 50 103 22)

Length :	CE	Weight :
10 m		4.38 kg

KRATOS SAFETY

689 Chemin du Buclay
38540 Heyrieux – FRANCE

Tel : +33 (0)4 72 48 78 27

Fax : +33 (0)4 72 48 58 32

www.kratossafety.com / info@kratossafety.com

HS CODE

8428 90 90

CARTON SIZE / PIECES

60 x 40 x 24 cm / 4

AET N°4023 Issue 4 Extension 2

Satra Technology Centre, N°0321
Wyndham Way, Telford Way, Kettering
Northamptonshire, NN16 8SD, United Kingdom

ARTICLE 11 GB07/73551

SGS United Kingdom Ltd., N°0120
Unit 202B, Worle Parkway,
Weston-super-Mare, BS22 6WA, United Kingdom