


Extremity post for trapezoidal sheet roof

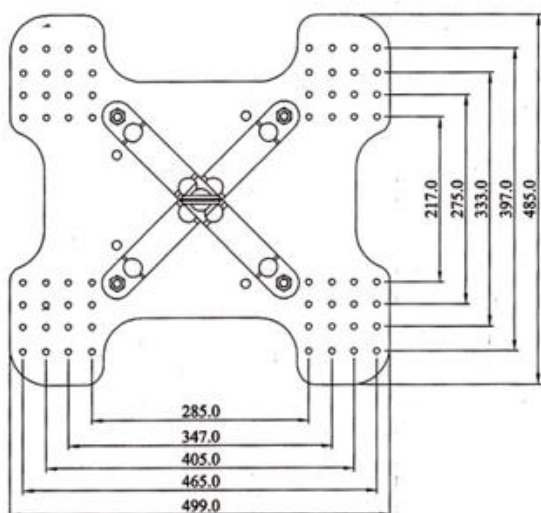

Fitted through 16 waterproof rivets on trapezoidal sheet roof.

Anchor plate with different holes to fit different dimensions (see center distances).

Provided with EPDM rubber for making the impermeability.

Minimum thickness of the sheet: 0.5 mm.

Number of users: 1

Compliance: EN 795:2012 Type A.

Static strength > 12 kN

Breaking strength > 15 kN

Material:

Stainless steel 316



Weight :

3.40 kg

KRATOS SAFETY

689, Chemin du Buclay
38540 HEYRIEUX (France) – FRANCE

Tel. : +33 (0)4 72 48 78 27

Fax. : +33 (0)4 72 48 58 32

www.kratossafety.com / info@kratossafety.com

HS CODE

83081000

CARTON SIZE / PCS.

58 x 54 x 24 cm / 1

Product tested at DOLOMITICERT

DolomitiCert Scarl

**Zona Industriale Villanova
32013 LONGARONE (ITALIE)**

Test report 160969 – Against EN795 : 2012 Type A