




FA 60 003 20, FA 60 003 30



A	15,5 cm
B	17 cm
C	16 cm
X	13,5 cm
Y	28 cm

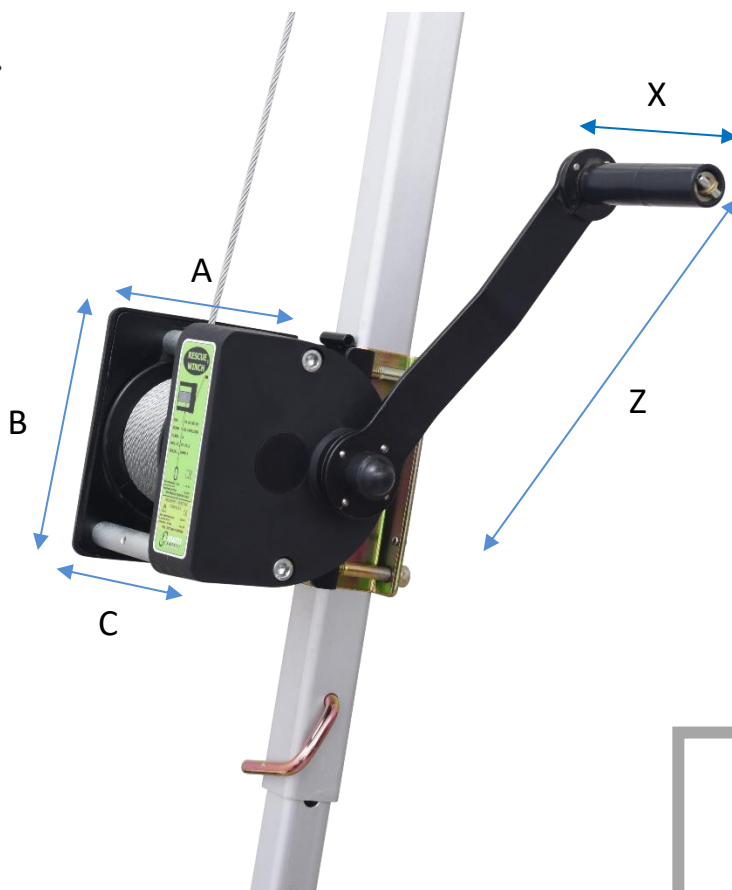






FA 60 003 20



FA 60 003 30



HS CODE
84251900
CARTON SIZE / PCS.
40 x 30 x 20 cm /1
Certificate of Test n°SPC0256516/1716 Issue 2 Ext. 1
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom

REF.	FA 60 003 20	FA 60 003 30
LG.	20 m	30 m
CE	EN 1496:2017 Class A	
	x1	
	135 KG	
MAT. 	 STEEL Ø 4.8 mm	 STEEL Ø 4.8 mm
R (kN) / MBS (kN)	---	---
+	(1) EN 13157 (1) Machinery Directive: 250 KG (1) ATEX Directive:  II2 G Exh IIC T6 Gb (2) Compatible FA 60 101 00, FA 60 102 00, in combination with FA 60 101 01 (2) Compatible FA 60 022 00, in combination with FA 60 022 06	
	7.95 KG	9.65 KG



Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer



Charge maxi admissible
Max. allowed load
Carga máxima admisible
Carico massimale ammissibile
Zulässige Höchstlast



Matière câble
Material wire rope
Material cable
Material dei cavo
Material Seil

+

R (kN) / MBS

(1)
Point fort
Key feature
Ventaja principal
Punti forti
Produktvorteil

(2)
À utiliser avec
To be used with
Para usar con
Ad essere utilizzato con
Verwendet werden soll mit

Résistance statique (en kN) / Résistance à la rupture (en kN)
Static strength (kN) / Minimum Breaking Strength (kN)
Resistencia estática (en kN) / Resistencia a la ruptura (kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)