



# Personal Protective Equipment

more than safety

## **Table of contents:**

<b>Gas protection - masks and respirators</b>	<b>3 - 7</b>
<b>Gas protection - filters and accessories</b>	<b>8 - 9</b>
<b>OxyPRO Sets</b>	<b>10 - 11</b>
<b>Exposition</b>	<b>12</b>
<b>Half masks</b>	<b>13 - 19</b>
<b>Protective coveralls</b>	<b>20 - 27</b>

# OxyPRO+ R9

## Class 3

### Head strap adjustment

### Panoramic viewfinder



Shockproof



Wide field of view



Anti scratch

### Face seal

Threaded connector  
**Rd40 1/7'**

EN 136: 1998  
EN 136:1998/AC:2003  
EN 166:2001  
EN 148-1:1999

### Filters with Rd40 1/7'

725 A2	201 A2-B2
725 A2-B2	201 A2-B2-E2
725 A2-B2-E2-K2	201 K2-P3
725 A2-B2-E2-K2-Hg-P3	202 A2-B2-E2-K2
725 A2-B2-E2-K2-P3	202 A2-B2-E2-P3 R
725 A2-B2-P3	202 A2-B2-P3 R
725 A2-P3	202 A2-P3
725 B2-E2	202 AX
725 B2-K2	202 B2-P3
725 B2-P3	202 E2-P3
725 K2	203 A2-B2-E2-K2-Hg-P3 RD
725 K2-P3	203 A2-B2-E2-K2-P3
725 P3	203 AX-P3
100 K2	203 UP3 A2-B2-E2-K2-Hg-CO-NO-P3
100 LD P3 R	205 A2-B2-E2-K1-P3 FORMALDEHYDE
100 P3	205 A2-B2-E2-K1-P3 RD CBRN PS
103 A1-P3	205 A2-B2-E2-K1-P3 RD REACTOR
200 A2	205 A2-P3 RD REACTOR (jodometan)
200 LBR A2	

### Suitable for use in explosive atmospheres (ATEX)

Ideal for working in polluted atmospheres where the proportion of oxygen in the air is higher than 19.5% by volume. The mask is compatible with canisters, particulate filters and filter canisters that have a standard connection thread in accordance with EN 148/1.

### Comfortable and super-durable

The mask body is made of thermoplastic rubber. It has five-point head straps that make it easy to put on the mask and stabilize it on the head. The inner mask is made of thermoplastic rubber and equipped with two inhalation valves. The mask has a panoramic polycarbonate visor that provides a wide field of vision. It is impact- and scratch-resistant and provides impact resistance to particles released at 120 m/s. For ease of use, it has a carrying strap made of flame-resistant PVC for hanging the mask around the neck during work breaks.

### Packaging:

Package dimensions: 250/200/140 mm

Dimensions of collecting carton: 730/560/480 mm

Net mask weight: 0,580 g

Gross weight of master carton: 20 kg

Number of masks in master carton: 24 pcs.



# OxyPRO X8

## Head strap adjustment

## Wide head straps

## Panoramic viewfinder

## Internal ventilation system

## Exhaust membrane cover



## Lightweight and comfortable

A high-quality full-face mask Oxyline X8 in combination with properly selected filtering elements provides effective protection of the face and respiratory tract against harmful effects of substances in the form of aerosols (dust, smoke, mist), vapours and gases or both these factors simultaneously. When designing Oxyline X8 mask we focused on ergonomics and high comfort of use. It is ensured by low weight of the mask (414 g) and appropriately shaped visor with a wide field of view, which does not disturb the image even in its lower part. Thanks to low bayonet connectors, the cleansing elements do not obstruct visibility. This design ensures that the mask is properly balanced, reducing the discomfort associated with strenuous work.

## Packaging:

Package dimensions: 250/210/155 mm  
Dimensions of the collection carton: 425/315/280 mm  
Net mask weight: 414 g  
Gross weight of master carton: 1.66 kg  
Number of masks in master carton: 4 pcs.

The wide sealing strip allows the mask to fit well mask to the face, and its porous structure prevents it from slipping during operation.

- The Oxyline X8 mask is offered in two sizes:

M and L. This gives you the opportunity to perfectly adjust the mask to the size and shape of the face.

- Four-point adjustable head straps allow you to easy and fast to put on the mask and its ergonomic shape ensures a stable position on the head while working.

- The large, panoramic visor is scratch-resistant, and the internal ventilation system prevents fogging.

- Combined with a wide range of elements. cleansing Oxyline X8 mask offers effective protection and comfortable use.

# OxyPRO X6

## Head strap adjustment

## Half mask size marking

## Exhaust membrane cover

## Quick release system of the respirator



## Ergonomic shape

The X6 series gas half mask is made of TPR thermoplastic rubber. It is used with two purifying elements. The respirator is made of three basic components: rigid body, soft face piece and carrying elements. The combination of rubber and plastic ensures proper wearing comfort and high durability of the product. The shape of the respirator makes it possible to use eye protection. Series X6 respirators are available in sizes S, M and L.

## Restrictions and storage

Do not use in an environment where the oxygen concentration is less than 19.5% and in the presence of unknown gases. Store in the original packaging with the instructions, without connected purification components at a temperature of -20°C to +30°C and humidity RH<80%. Protect from direct sunlight.

## Comfortable and super-durable

The three-stage adjustment of the headpiece and the possibility of smooth lowering the half-mask without the necessity to take off the head protection make it comfortable. Evenly distributed weight on the user's face ensures comfort and tight fit, so the respirator perfectly maintains its position while performing various activities.

## Packaging:

Dimensions of the collection carton: 500/455/165 mm  
Net weight of respirator: 150 g  
Gross weight of master carton: 3 kg  
Number of masks in master carton: 20 pcs

# OxyPRO X7

## Head strap adjustment

## Half mask size marking

## Exhaust membrane cover

## Quick release system of the respirator



## Ergonomic shape

Comfortable reusable half mask against gas X7 series is designed for work with two purifying elements. It provides respiratory protection against a wide range of harmful compounds, vapours and dust. The X7 respirator consists of three main components: a rigid body, an extremely soft facepiece and supporting elements. The fitted, ergonomic shape ensures optimal vision. The respirator is compatible with eye protection equipment. For a better fit, our X7 series respirators are available in sizes: S, M and L.

## Restrictions and storage

Do not use in an environment where the oxygen concentration is less than 19.5% and in the presence of unknown gases. Store in the original packaging with instructions, without connected purification components at a temperature of -20°C to +30°C and humidity RH<80%. Protect from direct sunlight.

## Comfortable and super-durable

The X7 series respirator is characterised by high resistance and durability. The evenly distributed weight on the user's face ensures comfort and tight fit, so the respirator perfectly maintains its position while performing various activities. The mask's headgear is 4-point adjustable and the fastening tapes are routed in such a way as to allow the mask to be lowered without removing the protective helmet. The respirator allows for easy access and quick inspection of the breathing membrane by removing the cover of the exhalation component.

## Packaging:

Dimensions of the collection carton: 500/455/165 mm  
Net weight of respirator: 150 g  
Gross weight of master carton: 3 kg  
Number of masks in master carton: 20 pcs





1



2



3



4




5



6



7



8



9



10

## Order codes:

1. OXY-FFP610 - viewfinder

2. OXY-FFS602 - inner face

3. OXY-FFS613 - main seal

4. OXY-FFS608 - exhaust valve cover

5. OXY-FFP605 - exhaust diaphragm

6. OXY-FFP615 - inspiratory membrane

7. OXY-FFS614 - bayonet connector gasket

8. OXY-FOFFP610 - protective film for the viewfinder

9. OXY-FFP611 - viewfinder frame

10. OXY-FFS601 - four-point head strap

# Filters

All filters, capsule filters, capsule filters, prefilters and accessories are compatible with X6, X7 and X8.

## X701 A1 Filter



REFERENCE CODE	NORM	FOIL	CARTON
OXY-X701A1-02	EN 14387	1 pair	30 pairs

## X702 A1E1 Filter



REFERENCE CODE	NORM	FOIL	CARTON
OXY-X702A1E1-02	EN 14387	1 pair	30 pairs

## X703 ABEK1 Filter



REFERENCE CODE	NORM	FOIL	CARTON
OXY-X703ABEK1-02	EN 14387	1 pair	30 pairs

## X705 A2 Filter



REFERENCE CODE	NORM	FOLIA	CARTON
OXY-X705A2-02	EN 14387	1 pair	30 pairs

## X793 P3 R Capsule filter



REFERENCE CODE	NORM	FOLIA	CARTON
OXY-X793P3R-02	EN 143	1 pair	72 pairs

## X793C P3 R Capsule filter



REFERENCE CODE	NORM	FOLIA	CARTON
OXY-X793CP3R-02	EN 143	1 pair	72 pairs

## X70926 ABEK1P3 R D Filter



REFERENCE CODE	NORM	FOIL	CARTON
OXY-X70926ABEK1P3 R D-02	EN 14387	1 pair	30 pairs

## X70923 A1E1P3 R D Filter



REFERENCE CODE	NORM	FOIL	CARTON
OXY-X70923A1E1P3RD-02	EN 14387	1 pair	30 pairs

## X70523 A2P3 R D Filter



REFERENCE CODE	NORM	FOIL	CARTON
OXY-X70523A2P3RD-02	EN 14387	1 pair	30 pairs

## T-BM P2 R Filter



REFERENCE CODE	NORM	FOIL	CARTON
TBMP2R-103	EN 143	1 pair	20 pairs

## T-BM A P2 R Filter



An additional layer of activated carbon.



REFERENCE CODE	NORM	FOIL	CARTON
TBMAP3R-103	EN 143	1 pair	20 pairs

## T-BM P3 R Filter



REFERENCE CODE	NORM	FOIL	CARTON
TBMP3R-103	EN 143	1 pair	20 pairs




# Filters

All filters, capsule filters, capsule filters, prefilters and accessories are compatible with X6, X7 and X8.

## T-BM A P3 R Filter

 An additional layer of activated carbon.



REFERENCE CODE	NORM	FOIL	CARTON
TBMAP3R-103	EN 143	1 pair	20 pairs

## X7N11 P2 R D Prefilter



REFERENCE CODE	NORM	FOIL	CARTON
OXY-X7N11P2R-04	EN 14387	2 pair	100 pairs

## X7N13 P3 D Prefilter



REFERENCE CODE	NORM	FOIL	CARTON
OXY-X7N13P3D-04	EN 143	2 pair	100 pairs

## X501 Pre-filter cover



Combines with absorbers X701 A1, X702 A1E1, X703 ABEK1, X705 A2, so it can work with **X6** and **X7** series half masks and **X8** series full-face masks.

REFERENCE CODE	NORM	BOX	CARTON
OXY-X701A1-02	—	20 pcs	200 pcs






## X520 Absorber cap



Used to connect absorbers X701 A1, X702 A1E1, X703 ABEK1 and X705 A2 with particulate filters T-BM P2 R, T-BM A P2 R, T-BM P3 R, T-BM A P3 R, X2000-OV P3 R, X2000-AG P3 R, X793 P3 R, X793C P3 R.

REFERENCE CODE	NORM	BOX	CARTON
OXY-X701A1-02	—	20 pcs	200 pcs

## Filter color designations:


-  **A** Organic vapors, solvents with a boiling point > 65°C
-  **B** Inorganic gases and vapors (chlorine, hydrogen sulfide, hydrogen cyanide)
-  **E** Sulfur dioxide
-  **K** Ammonia and organic ammonia derivatives
-  **P** Particles (dusts and aerosols)

## Half mask X6

## Prefilter X7N11 P2 R D

## Pre-filter cover X501

## Filter X701 A1

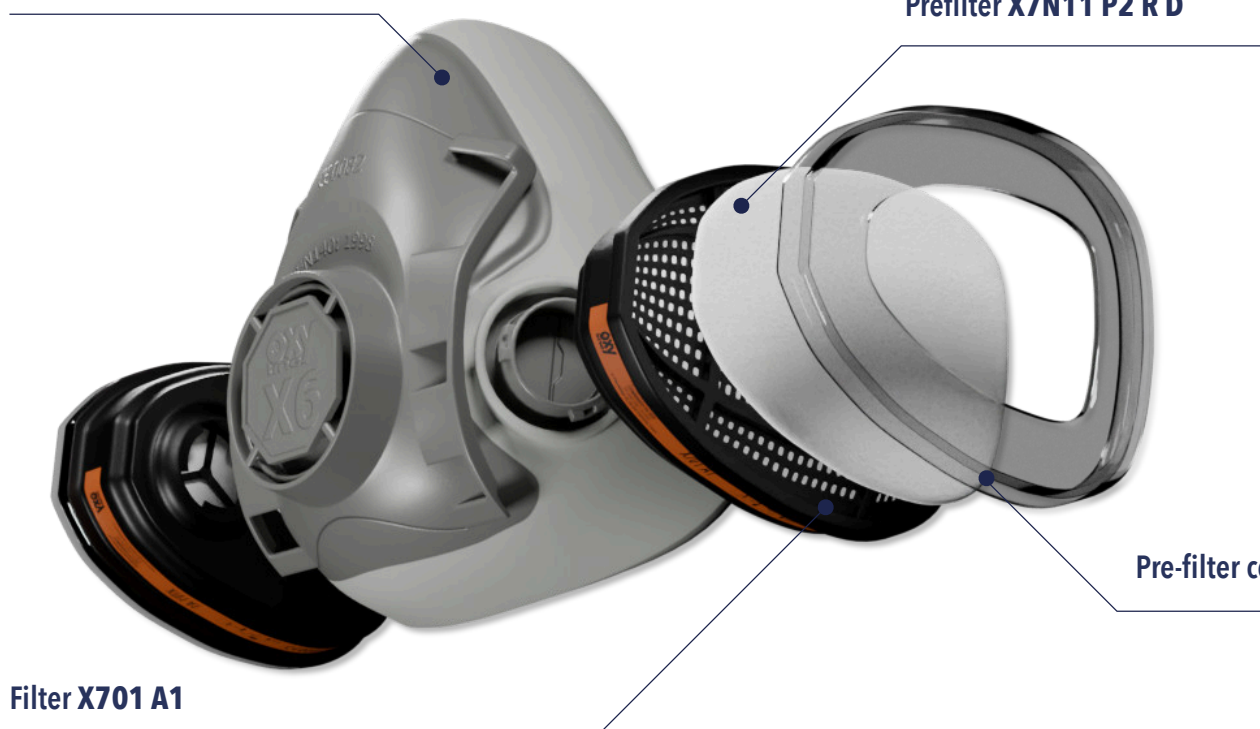

## AGRO BASIC SET

- 1 × Half mask **X6**
- 2 × Filter **X703 ABEK1**
- 4 × Pre-filter for dust **X7N11 P2 R D**
- 2 × Pre-filter cover absorbers **X501**

REFERENCE CODE	SIZE
ZX6SABEK17N11P2-f	S
ZX6MABEK17N11P2-f	M
ZX6LABEK17N11P2-f	L



## AGRO STANDARD SET

- 1 × Half mask **X6**
- 2 × Filter **X703 ABEK1**
- 4 × Pre-filter for dust **T-BM P3 R**
- 2 × Pre-filter cover absorbers **X520**

REFERENCE CODE	SIZE
ZX6SABEK1TBMP3-f	S
ZX6MABEK1TBMP3-f	M
ZX6LABEK1TBMP3-f	L



## CHEMIC BASIC SET

- 1 × Half mask **X6**
- 2 × Filter **X703 ABEK1**

REFERENCE CODE	SIZE
ZX6SABEK1-f	S
ZX6MABEK1-f	M
ZX6LABEK1-f	L



## CHEMIC PRO SET

- 1 × Half mask **X6**
- 2 × Filter absorber **X703 ABEK1**

REFERENCE CODE	SIZE
ZX6SABEK1P3-f	S
ZX6MABEK1P3-f	M
ZX6LABEK1P3-f	L



## GRINDER STANDARD SET

- 1 × Half mask **X6**
- 2 × Filter **X793C P3 R**

REFERENCE CODE	SIZE
ZX6S793C-f	S
ZX6M793C-f	M
ZX6L793C-f	L



## AGRO BASIC+ SET

- 1 × Half mask **X7 (silicon)**
- 2 × Filter **X703 ABEK1**
- 4 × Pre-filter for dust **X7N11 P2 R D**
- 2 × Pre-filter cover absorbers **X501**

REFERENCE CODE	SIZE
ZX7SABEK17N11P2-f	S
ZX7MABEK17N11P2-f	M
ZX7LABEK17N11P2-f	L

## AGRO STANDARD+ SET

- 1 × Half mask **X7 (silicon)**
- 2 × Filter **X703 ABEK1**
- 4 × Pre-filter for dust **T-BM P3 R**
- 2 × Pre-filter cover absorbers **X520**

REFERENCE CODE	SIZE
ZX7SABEK1TBMP3-f	S
ZX7MABEK1TBMP3-f	M
ZX7LABEK1TBMP3-f	L

## CHEMIC BASIC+ SET

- 1 × Half mask **X7 (silicon)**
- 2 × Filter **X703 ABEK1**

REFERENCE CODE	SIZE
ZX7SABEK1-f	S
ZX7MABEK1-f	M
ZX7LABEK1-f	L

## CHEMIC PRO+ SET

- 1 × Half mask **X7 (silicon)**
- 2 × Filter absorber **X703 ABEK1**

REFERENCE CODE	SIZE
ZX7SABEK1P3-f	S
ZX7MABEK1P3-f	M
ZX7LABEK1P3-f	L

## GRINDER STANDARD+ SET

- 1 × Half mask **X7 (silicon)**
- 2 × Filter **X793C P3 R**

REFERENCE CODE	SIZE
ZX7S793C-f	S
ZX7M793C-f	M
ZX7L793C-f	L

## GRINDER BASIC SET

- 1 × Half mask **X6**
- 2 × Filter **T-BM P3 R**

REFERENCE CODE	SIZE
ZX6STBMP3-f	S
ZX6MTBMP3-f	M
ZX6LTBMP3-f	L



## GRINDER BASIC+ SET

- 1 × Half mask **X7 (silicon)**
- 2 × Filter **T-BM P3 R**

REFERENCE CODE	SIZE
ZX7STBMP3-f	S
ZX7MTBMP3-f	M
ZX7LTBMP3-f	L

## PAINTER BASIC SET

- 1 × Half mask **X6**
- 2 × Filter **X701 A1**
- 4 × Pre-filter for dust **X7N11 P2 R D**
- 2 × Pre-filter cover absorbers **X501**

REFERENCE CODE	SIZE
ZX6SA17N11P2-f	S
ZX6MA17N11P2-f	M
ZX6LA17N11P2-f	L



## PAINTER BASIC+ SET

- 1 × Half mask **X7 (silicon)**
- 2 × Filter **X701 A1**
- 4 × Pre-filter for dust **X7N11 P2 R D**
- 2 × Pre-filter cover absorbers **X501**

REFERENCE CODE	SIZE
ZX7SA17N11P2-f	S
ZX7MA17N11P2-f	M
ZX7LA17N11P2-f	L

## PAINTER EXPERT SET

- 1 × Half mask **X6**
- 2 × Filter **X70523 A2 P3 R D**

REFERENCE CODE	SIZE
ZX6SA2P3-f	S
ZX6MA2P3-f	M
ZX6LA2P3-f	L



## PAINTER EXPERT+ SET

- 1 × Half mask **X7 (silicon)**
- 2 × Filter **X70523 A2 P3 R D**

REFERENCE CODE	SIZE
ZX7SA2P3-f	S
ZX7MA2P3-f	M
ZX7LA2P3-f	L

## PAINTER STANDARD SET

- 1 × Half mask **X6**
- 2 × Filter **X705 A2**
- 4 × Pre-filter for dust **X7N11 P2 R D**
- 2 × Pre-filter cover absorbers **X501**

REFERENCE CODE	SIZE
ZX6SABEK17N11P2-f	S
ZX6MABEK17N11P2-f	M
ZX6LABEK17N11P2-f	L



## PAINTER STANDARD+ SET

- 1 × Half mask **X7 (silicon)**
- 2 × Filter **X705 A2**
- 4 × Pre-filter for dust **X7N11 P2 R D**
- 2 × Pre-filter cover absorbers **X501**

REFERENCE CODE	SIZE
ZX7SABEK17N11P2-f	S
ZX7MABEK17N11P2-f	M
ZX7LABEK17N11P2-f	L

## PAINTER ADVANCED SET

- 1 × Full face mask **X8**
- 2 × Filter **X701 A1**
- 4 × Pre-filter for dust **X7N11 P2 R D**
- 2 × Pre-filter cover absorbers **X501**



REFERENCE CODE	SIZE
ZX8MA17N11P2-b	M
ZX8LA17N11P2-b	L



## PAINTER ADVANCED+ SET

- 1 × Full face mask **X8**
- 2 × Filter **X70523 A2 P3 R D**



REFERENCE CODE	SIZE
ZX8MA2P3-b	M
ZX8LA2P3-b	L





- **OXYPRO BASKET RACK**

The OxyPRO basket rack consists of one basket and hooks.

Dimensions: 226x60x52cm

- **OXYPRO CASE**

**OXYPRO CASE** consists of a foam profiled for OxyPRO products and a foam top.

Dimensions: 155x450x360mm



# Filtering Half Masks

EN 149:2001+A1:2009

## X 310 SV FFP3 R D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



## X 310 SV FFP3 NR D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Absorbent sealing
- For the food industry
- Exhalation valve



## XS 310 V FFP3 R D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



## XS 310 FFP3 R D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Absorbent sealing



## X 320 SV FFP3 R D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Absorbent sealing
- Detachable belt
- Exhalation valve



## X 320 SV FFP3 R D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Absorbent sealing
- Detachable belt
- Exhalation valve



Respirators without exhalation valve are designed mostly for work not requiring material physical effort.

# Filtering Half Masks

EN 149:2001+A1:2009

## X 310 FFP3 NR

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Compliant with:  
14683:2019+AC:2009  
TYPE: II R



## X 310 SV FFP3 NR D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



**MEDICAL DEVICE**

## X 210 V FFP2 R D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



## X 210 SV FFP2 R D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve
- Absorbent sealing



**MEDICAL DEVICE**

## X 200 V FFP2 R D

- Protection up to **10 x OEL**
- Exhalation valve



## X 210 FFP2 NR D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Compliant with:  
14683:2019+AC:2009  
TYPE: II R



Respirators without exhalation valve are designed mostly for work not requiring material physical effort.



# Filtering Half Masks

EN 149:2001+A1:2009

## X 200 FFP2 R D

- Protection up to **10 x OEL**



## X 210 V FFP2 NR D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Absorbent sealing
- For the food industry
- Exhalation valve



## X 110 FFP1 R D

- Protection up to **4 x OEL**
- Adjustable the length of the head harness straps



## X 110 V FFP1 R D

- Protection up to **4 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



## X 100 FFP1 R D

- Protection up to **4 x OEL**



## X 100 V FFP1 R D

- Protection up to **4 x OEL**
- Exhalation valve



Respirators without exhalation valve are designed mostly for work not requiring material physical effort.

# Filtering Half Masks

EN 149:2001+A1:2009

## XC 110 V FFP1 R D


- Protection up to **4 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



**ACTIVE CARBON**

## XF 110 V FFP1 NR D

- Protection up to **4 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve

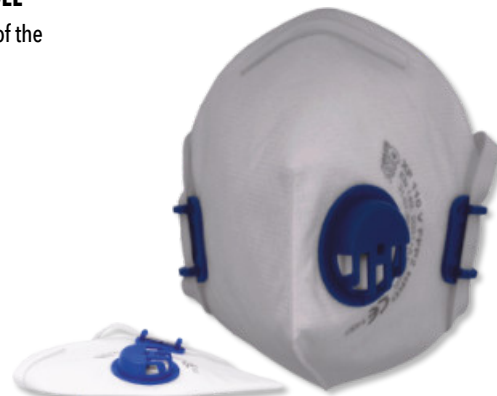

## XC 210 V FFP2 R D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



**ACTIVE CARBON**

## XF 250 V FFP2 NR D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



## XCS 310 V FFP3 R D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- The inner sealing insert made of polyurethane, to improve the seal and fit to the face
- Exhalation valve



**ACTIVE CARBON**

## XF 350 V FFP3 NR D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



Respirators without exhalation valve are designed mostly for work not requiring material physical effort.

# Filtering Half Masks

EN 149:2001+A1:2009

## XA 200 FFP2 NR D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Precise sealing of the nose cap



## XA 300 FFP3 NR D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Precise sealing of the nose cap



## XA 200 V FFP2 NR D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Precise sealing of the nose cap
- Exhalation valve



## XA 300 V FFP3 NR D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Precise sealing of the nose cap
- Exhalation valve



## XA 200 V FFP2 NR D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Precise sealing of the nose cap
- Exhalation valve



## XA 300 V FFP3 NR D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Precise sealing of the nose cap
- Exhalation valve
- For the food industry



Respirators without exhalation valve are designed mostly for work not requiring material physical effort.



# Filtering Half Masks

EN 149:2001+A1:2009

## DONALD FFP2 NR D



### MEDICAL DEVICE

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Compliant with: 14683:2019+AC:2009  
TYPE: II R

## DONALD V FFP2 NR D



- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve

## DONALD FFP3 NR D



### MEDICAL DEVICE

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Compliant with: 14683:2019+AC:2009  
TYPE: II R

## DONALD V FFP3 NR D



- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve

## XR 250 FFP2 NR



### MEDICAL DEVICE

- **Oxyline** halfmask flat fold 3 - Panels
- **FFP2** - EN 149:2001+A1:2009
- **Medical Product TYPE: II R**
- EN 14683:2019+AC:2009
- A model to enhance work safety
- With ear elastics

**Product code for order:**

White - **XR250FFP2NR-W**

Black - **XR250FFP2NR-B**

## XR 350 FFP3 NR



### MEDICAL DEVICE

- **Oxyline** halfmask flat fold 3 - Panels
- **FFP2** - EN 149:2001+A1:2009
- **Medical Product TYPE: II R**
- EN 14683:2019+AC:2009
- A model to enhance work safety
- With ear elastics

**Product code for order:**

White - **XR350FFP2NR-W**

Black - **XR350FFP2NR-B**

Respirators without exhalation valve are designed mostly for work not requiring material physical effort.






# Ways of packing half masks

NUMER	SHAPE	MODEL	RETAIL BOX			RETAIL COLOR FOIL		ADDITIONAL INFORMATION
			TRANSPARENT FOIL (PCS.)	BOX (PCS.)	CARTON (PCS.)	COLOR FOIL (PCS.)	CARTON (PCS.)	
1	CUP	X 310 FFP3 NR (Medical type II R)	1	5, 10	300	3	300	1 EP (Euro Pallet) = 12-16 cartons more about packing in agenda at below *medical device certified also with EN 14683
2	CUP	X 310 SV FFP3 R D	1	5, 10	300, 360	3	300	1 EP=12-16 cartons Masks available also in version NR
3	CUP	XS 310 V FFP3 R D	1	5, 10	300, 360	3	300	1 EP=12 cartons Masks available also in version NR
4	CUP	XCS 310 V FFP3 R D (Active carbon)	1	8	288	—	—	1 EP=12 cartons Masks available also in version NR
5	CUP	X 320 SV FFP3 R D	1	5, 10	300, 360	3	300	1 EP=12-16 cartons Masks available also in version NR
6	CUP	X 320 SV FFP3 R D (Black)	1	10	360	—	—	1 EP=12 cartons Masks available also in version NR
7	CUP	X 310 SV FFP3 NR D (Blue)	1	5, 10	300, 360	3	300	1 EP=12-16 cartons *Recommended for food industry/detachable
8	FLAT FOLDED	XF 310 V FFP3 NR D	—	12	432	—	—	1 EP=12-16 cartons (Flat folded VERTICAL)
9	FLAT FOLDED	DONALD FFP3 NR D	1	2	360	—	—	1 EP=12-16 cartons (Flat folded HORIZONTAL)
10	FLAT FOLDED	DONALD V FFP3 NR D	1	20	320	—	—	1 EP=12-16 cartons (Flat folded HORIZONTAL)
11	FLAT FOLDED 3-PANELS	XR 350 FFP2 NR	1	20	960	—	—	1 EP=12-16 cartons*Medical device certified also with EN 14683
12	CUP	X 200 FFP2 R D	—	15, 20	540, 600	3	300	1 EP=12-16 cartons Masks available also in version NR
13	CUP	X 200 V FFP2 R D	—	10	360	3	300	1 EP=12-16 cartons Masks available also in version NR
14	CUP	X 210 FFP2 NR D (Medical type II R)	—	10	360	3	300	1 EP=12-16 cartons *Medical device certified also with EN 14683
15	CUP	X 210 V FFP2 R D	—	10	360	3	300	1 EP=12-16 cartons Masks available also in version NR
16	CUP	X 210 SV FFP2 R D	—	10	360	3	300	1 EP=12-16 cartons Masks available also in version NR
17	CUP	X 200 V FFP2 NR D (Blue)	—	10	360	3	300	1 EP=12-16 cartons
18	CUP	XC 210 V FFP2 R D (Active carbon)	1	8	288	3	300	1 EP=12-16 cartons Masks with Active Carbon layer
19	FLAT FOLDED	XF 210 V FFP2 NR D	—	12	432	—	—	1 EP=12-16 cartons
20	FLAT FOLDED	DONALD FFP2 NR D (Medical type II R)	1	20	320	—	—	1 EP=12-16 cartons *Medical device certified also with EN 14683
21	FLAT FOLDED	DONALD V FFP2 NR D	1	20	320	—	—	1 EP=12-16 cartons
22	FLAT FOLDED 3-PANELS	XR 250 FFP2 NR	1	20	960	—	—	1 EP=12-16 cartons *Medical device certified also with EN 14683
23	CUP	X 100 FFP1 R D	—	15, 20	540, 600	3	300	1 EP=12-16 cartons Masks available also in version NR
24	CUP	X 100 V FFP1 R D	—	10	500	3	300	1 EP=12-16 cartons Masks available also in version NR
25	CUP	X 110 FFP1 R D	—	10	360	3	300	1 EP=12-16 cartons Masks available also in version NR
26	CUP	X 110 V FFP1 R D	—	10	360	3	300	1 EP=12-16 cartons Masks available also in version NR
27	CUP	XC 110 V FFP1 R D (Active carbon)	1	8	288	3	300	1 EP=12-16 cartons Masks with Active Carbon layer
28	FLAT FOLDED	XF 110 V FFP1 NR D	—	12	432	—	—	1 EP=12-16 cartons Flat folded HORIZONTAL

# OxyChem C110

Protective coverall, Cat. III, Type 5, 6

Protection compliant with standards

TYPE 6	TYPE 5	Particulate radioactive contamination (no radiation)	Requirements for anti-static clothing	Protection of general clothing
				
EN13034:2005 +A1:2009	EN ISO 13982:2004 +A1:2010	EN1073-2:2002	EN1149-5:2018	EN ISO 13688:2013

## Lightweight and tough


OxyChem C110 provides limited Type 5/6 chemical protection and is made from a 55g/m<sup>2</sup> "breathable" Spunbond-Meltblown-Spunbond (SMS) nonwoven polypropylene fabric which results in a much more comfortable working environment. OxyChem C110 also provides protection against radioactive dust and has anti-electrostatic properties. Its construction has been designed to provide the user with the highest possible level of safety, ergonomics and comfort when working.

### Properties:

- Spunbond-Meltblown-Spunbond (SMS) material Non-woven polypropylene, 55g/m<sup>2</sup>.
- Three-panel hood
- Two-way zipper with flap covering the express
- Two-piece cut in the crotch
- Elastic cuffs, legs, waist and hood
- Elastic thumb loop - Durable overlock stitching on the inside
- Colour: white, blue

### Example of application:

- Painting
- Plastering
- Bricklaying
- Demolition work
- Asbestos work
- Working with wood and plastic
- Grinding (e.g. plaster sanding)
- Cleaning, housekeeping
- Stone work
- Attic insulation with mineral wool
- Glass fibre processing
- General production and maintenance work
- In the pharmaceutical industry



Material



Comfortable three-panel hood



Two-piece cut at the crotch



Two-way zipper zipper with a flap covering the express








Elastic loop for thumb



# OxyChem C110B

Protective coverall, Cat. III, Type 5, 6

Protection compliant with standards

TYPE 6	TYPE 5	Particulate radioactive contamination (no radiation)	Requirements for anti-static clothing	Protection of general clothing
				
EN13034:2005 +A1:2009	EN ISO 13982:2004 +A1:2010	EN1073-2:2002	EN1149-5:2018	EN ISO 13688:2013

## Lightweight and tough


OxyChem C110 provides limited Type 5/6 chemical protection and is made from a 55g/m<sup>2</sup> "breathable" Spunbond-Meltblown-Spunbond (SMS) nonwoven polypropylene fabric which results in a much more comfortable working environment. OxyChem C110 also provides protection against radioactive dust and has anti-electrostatic properties. Its construction has been designed to provide the user with the highest possible level of safety, ergonomics and comfort when working.

### Properties:

- Spunbond-Meltblown-Spunbond (SMS) material Non-woven polypropylene, 55g/m<sup>2</sup>.
- Three-panel hood
- Two-way zipper with flap covering the express
- Two-piece cut in the crotch
- Elastic cuffs, legs, waist and hood
- Elastic thumb loop - Durable overlock stitching on the inside
- Colour: white, blue

### Example of application:


- Painting
- Plastering
- Bricklaying
- Demolition work
- Asbestos work
- Working with wood and plastic
- Grinding (e.g. plaster sanding)
- Cleaning, housekeeping
- Stone work
- Attic insulation with mineral wool
- Glass fibre processing
- General production and maintenance work
- In the pharmaceutical industry




Material



Comfortable three-panel hood



Two-piece cut at the crotch



Two-way zipper with a flap covering the express



Elastic loop for thumb

# OxyChem C210

Protective coverall, Cat. III, Type 5, 6. Medical Device Class I

MEDICAL DEVICE

Protection compliant with standards

Type 6 - Protective clothing  
against liquid chemicals -  
low-pressure splashes

Type 5 - Protective  
clothing against solid  
particles

Protective clothing  
against radioactive  
contamination

Electrostatic  
properties

Protection  
against  
infectious agents

Protection of  
general clothing



EN13034:2005  
+A1:2009



ENISO13982-1:2004  
+A1:2010



EN1073-2:2002



EN1149-5:2018



EN14126:2003  
+AC:2004



ENISO13688:2013

## Lightweight and tough

The OxyChem C210 protective suit is designed for protection in It is designed to provide protection in areas exposed to infectious materials and provides limited type 5/6 anti-chemical protection. It is made of non-woven fabric laminated with a microporous film (MPFL) of 63g/m2 +/- 2g/m2 . Outer layer: polyethylene film. Inner layer: polypropylene fibres. Non-woven fabric (MPFL) is resistant to permeation infectious agents. OxyChem C210 also provides protection against radioactive contamination and has anti-electrostatic properties. Its construction is designed to provide the wearer with the highest level of safety, ergonomics and comfort during work.

## Properties:

- Spunbond fabric laminated with microporous film (MPFL), 63g/m2 +/- 2g/m2
- Three-panel hood
- Two-way zip with fabric patch
- Two-piece crotch cut
- Elastic cuffs, legs, waist and hood
- Elastic thumb loop
- Durable overlock seams on the inside

## Example of application:

- When working with asbestos
- When painting and spray-painting
- When laying insulation and earthworks
- When working on water supply systems, in sewers
- In the pharmaceutical industry
- When working with resin
- Machine maintenance
- During light spraying work, e.g. in agriculture
- In the automotive industry
- Grinding and polishing
- In the pharmaceutical and medical industries



Material



Comfortable  
three-panel hood



Two-piece  
cut at the crotch



Two-way zipper  
zipper with a flap  
covering the express




Elastic  
loop for  
thumb

# OxyChem C250

Protective coverall, Cat. III, Type 5, 6

Protection compliant with standards

<b>Type 6</b> - Protective clothing against liquid chemicals - low-pressure splashes	<b>Type 5</b> - Protective clothing against solid particles	Protective clothing against radioactive contamination	Electrostatic properties	Protection against infectious agents	Protection of general clothing
					
EN13034:2005 +A1:2009	ENISO13982:2004 +A1:2010	EN1073-2:2002	EN1149-5:2018	EN14126:2003 +AC:2004	EN13688:2013

## Lightweight and tough

The OxyChem C250 provides limited chemical protection type 5/6. It is made of fabric laminated with microporous film (MPFL) of 63g/m<sup>2</sup>. Outer layer: polyethylene film. Inner layer: polypropylene fibres, which is resistant to infectious agents penetration. The "breathable" panel is made of SpunbondMeltblown-Spunbond (SMS) non-woven polypropylene fabric with a weight of 55g/m<sup>2</sup>. OxyChem C250 also provides protection against radioactive dust and has anti-electrostatic properties. Its construction is designed to provide the user with the highest possible level of safety, ergonomics and comfort during work.

## Properties:

- Spunbond fabric laminated with microporous film (MPFL) 63g/m<sup>2</sup> + (SMS) 55g/m<sup>2</sup> "breathable panel"
- Two-way zip with adhesive patch
- Two-piece cut in the crotch
- Elastic ribbing on cuffs, legs, waist and hood
- Elastic thumb loop
- Durable overlock seams on the inside

## Examples of application:

- Work with asbestos
- Painting and spray-painting
- Insulation laying, ground work
- Work on water pipes, in sewers
- Pharmaceutical industry
- Maintenance of machinery
- Light spraying, agriculture
- Automotive, cleanrooms
- Grinding, polishing
- Work in the pharmaceutical industry



Material



Comfortable three-panel hood



Two-piece cut at the crotch



Two-way zipper with a flap covering the express



Elastic loop for thumb



# OxyChem C310

Protective coverall, Cat. III, Type 5, 6. Medical Device Class I

Protection compliant with standards

MEDICAL DEVICE

**Type 6** - Protective clothing against liquid chemicals - low-pressure splashes



EN13034:2005 +A1:2009

**Type 5** - Protective clothing against solid particles



ENISO13982-1:2004 +A1:2010

**Type 4** - Protective clothing against liquid chemicals - Spray liquid



EN14605:2005 +A1:2009

Protective clothing against radioactive contamination



EN1073-2:2002

Electrostatic properties



EN1149-5:2018

Protection against infectious agents



EN14126:2003 +AC:2004

Protection of general clothing



EN ISO 13688:2013

## Lightweight and tough


The OxyChem C310 protective suit is designed for protection in areas exposed to infectious material and provides limited chemical protection type 4/5/6. It is also a component of the Individual Biological Protection Kit (IZOB), created in accordance with the WHO recommendation. It is made of non-woven fabric laminated with microporous film (MPFL) of 63 g/m<sup>2</sup> +/- 2 g/m<sup>2</sup>. Outer layer: polyethylene film. Inner layer: polypropylene nonwoven fabric. Non-woven fabric (MPFL) is resistant to infectious agents penetration. OxyChem C310 also provides protection against radioactive contamination and has anti-electrostatic properties. Its construction is designed to provide the wearer with the highest level of safety, ergonomics and comfort during work.

### Properties:

- Spunbond laminated with microporous film (MPFL), 63g/m<sup>2</sup> +/- 2g/m<sup>2</sup>
- Additionally taped seams
- Three-panel hood
- Two-way zip with self-fabric patch
- Two-piece cut in the crotch
- Elastic ribbing on cuffs, legs, waist and hood
- Elastic thumb loop
- Durable overlock seams on the inside, taped on the outside with blue tape

### Examples of application:


- In the pharmaceutical industry
- In contact with toxic materials
- When securing crime scenes
- In veterinary medicine
- In hospitals
- When working with sick people, e.g. during a pandemic
- When working with asbestos
- When painting and spray-painting



Material



Comfortable three-panel hood



Two-piece cut at the crotch



Two-way zipper with a flap covering the express



Elastic loop for thumb



The **OxyLac** suit, thanks to its increased protective properties, the **OxyLac** suit provides even better protection against dirt, dust, aerosols, grime.

### Properties:

- One hundred percent (MPFL) 55g/m2 polypropylene material (coated with microporous film) increases its strength and resistance to external factors
- Ergonomic hood
- Extended zipper cover
- Elastic cuffs on hood, wrists and legs for a better seal
- Drawstring waist for a better fit and increased comfort



Ergonomic hood



Drawstring waist

The **KPP40** suit guarantees an adequate level of protection to the wearer in the part covered by the suit against hazards caused by non-toxic dusts, non-toxic solids and similar non-toxic wastes and against light physical hazards such as abrasions, scratches etc. and small splashes of non-toxic liquids. This PPE should not be used for other types of hazards.

### Properties:

- Material 100% polypropylene (PP) 40 g/m2(white)
- Hood
- Zipper
- Elastic ribbing on cuffs, legs, waist and hood
- Durable overlock stitching on the inside

### Examples of application OxyLac i KPP40:

- Painting
- Repair and construction work
- Repair and maintenance of machinery and equipment
- Protection against dusts and non-hazardous substances
- Application of industrial coatings
- Inspection of workplaces (visitor suit)
- Pharmaceutical and medical industry
- Cleaning
- Disinfection

# ONBW 50

## High-boot cover

### Properties


- Made of barrier material - non-woven fabric laminated with (MPFL) microporous film 65g/m<sup>2</sup>
- External layer:** polyethylene film
- Inner layer:** polypropylene unwoven fabric
- Elastic legs to fit the leg
- Straps to prevent slipping - increasing comfort of use
- Colour: white

### Examples of application:

- Painting
- Repair and construction work
- Repair and maintenance of machinery and equipment
- Protection against dusts and non-hazardous substances
- Application of industrial coatings
- Inspection of workplaces (visitor guards)
- Garden work
- Cleaning work
- Protection of clothing

### Packing:

Quantity per carton: 50 pairs (100 pcs.)  
Carton dimensions: 43cm x 30cm x 24cm



# ONBWUR 50

## Cover for high boots with anti-slip sole

### Properties:


- Made of barrier material - non-woven fabric laminated with (MPFL) microporous film 65g/m<sup>2</sup>
- External layer:** polyethylene film
- Inner layer:** non-woven polypropylene
- Anti-slip sole 530g/m<sup>2</sup>
- Elastic legs to fit the leg
- Straps to prevent slipping - increasing comfort of use
- Colour: white

### Examples of application:

- Painting
- Repair and construction work
- Repair and maintenance of machinery and equipment
- Protection against dusts and non-hazardous substances
- Application of industrial coatings
- Inspection of workplaces (visitor guards)
- Garden work
- Cleaning work
- Protection of clothing

### Packing:

Quantity per carton: 50 pairs (100 pcs.)  
Carton dimensions: 43cm x 30cm x 24cm



The bottom of the sole with an additional anti-slip layer



# Technical data of the coveralls

ACHIEVED PERFORMANCE LEVELS						
Tests		Standards	OxyChem C110	OxyChem C210	OxyChem C250	OxyChem C310
Protection type	Limited protective performance against light spray, liquid aerosol or low pressure, low volume splashes and infective agents	EN 13034	Type 6	Type 6B	Type 6B	Type 6B
	Protection against airborne solid particulates and infective agents	EN ISO 13982-1	Type 5	Type 5B	Type 5B	Type 5B
	Protective performance against spray and infective agents	EN 14605	-	-	-	Type 4B
Total Inward Leakage		EN 1073-2	Class 1	Class 2	Class 1	Class 2
Protection against Infective / Infective agents	Pressure test, resistance to blood and body fluid penetration using synthetic blood	EN 14126	-	Class 6	Klasa 6 (Only on microporus fabric)	Class 6
	Resistance to penetration of pathogens from the blood with the use of bacteriophages (Fag Fi-X174) (resistance to the penetration of viruses)		-	Class 6	-	Class 6
	Resistance to penetration by infective agents due to mechanical contact with substances containing contaminated liquids		-	Class 6	Klasa 6 (Only on microporus fabric)	Class 6
	Resistance to penetration by contaminated liquid aerosols		-	Class 3	Klasa 3 (Only on microporus fabric)	Class 3
	Resistance to penetration by contaminated solid particles		-	Class 3	Klasa 3 (Only on microporus fabric)	Class 3
Cytotoxicity study		EN ISO 10993-5	-	It is not cytotoxic	-	It is not cytotoxic

Sizes	S	M	L	XL	XXL	XXXL
Height	164-170	170-176	176-182	182-188	189-194	194-200
Circuit	84-92	92-100	100-108	108-117	116-124	124-132

Logistical details	C110	C110B	C210	C250	C310	OxyLac	KPP30
Number of suits per box	50 pcs.	50 pcs.	50 pcs.	50 pcs.	50 pcs.	50 pcs.	50 pcs.
Number of suits per pallet	950 pcs.	950 pcs.	1000 pcs.	1000 pcs.	1000 pcs.	1200 pcs.	-
Number of cartons per pallet	19 pcs.	19 pcs.	20 pcs.	20 pcs.	20 pcs.	24 pcs.	-
Weight of carton	10,6 kg	10,6 kg	12,8 kg	10,6 kg	13 kg	10 kg	-
Size of carton	48x28x62cm	48x28x62cm	48x28x54cm	48x28x56cm	48x28x60cm	48x28x46cm	48x28x37cm

## NOTES



**Oxyline Sp.z o.o.**  
95-200 Pabianice, Poland  
ul. Piłsudskiego 23  
tel.: +48 42 215 10 68  
e-mail: [oxyline@oxyline.eu](mailto:oxyline@oxyline.eu)

**more than safety**



[www.oxyline.eu](http://www.oxyline.eu)