



# Personal Protective Equipment

more than safety

# About us

Oxyline has been operating since 2008, specializing in the production of personal protective equipment for respiratory protection. Our range includes filtering half masks, filters and gas absorbers, protective coveralls, isolation systems, protective gloves, and solutions designed for high-risk work environments, as well as for garage use and do-it-yourself (DIY) projects. Our products are used in Poland, across Europe, South America, and Australia. With years of experience, an individual approach to each client, and proprietary patented technologies, we develop protective equipment that effectively supports safety in demanding work conditions.

**Oxyline - more than safety.**



**ISO 14001**

LL-C (Certification)



**ISO 13485**

LL-C (Certification)

## Table of contents:

<b>Gas protection - masks and respirators</b>	<b>3 - 6</b>
<b>OxyPRO Sets</b>	<b>7 - 10</b>
<b>Gas protection - filters and accessories</b>	<b>11 - 13</b>
<b>Exposition</b>	<b>14</b>
<b>Half masks</b>	<b>15 - 21</b>
<b>Fall protection set</b>	<b>22</b>
<b>Protective coveralls</b>	<b>23 - 30</b>

# OxyPRO+ R9

## Class 3

### Head strap adjustment

### Panoramic viewfinder



Shockproof



Wide field of view



Anti scratch

### Face seal

Threaded connector  
**Rd40 1/7'**

EN 136: 1998  
EN 136:1998/AC:2003  
EN 166:2001  
EN 148-1:1999



### Filters with Rd40 1/7'

725 A2	201 A2-B2
725 A2-B2	201 A2-B2-E2
725 A2-B2-E2-K2	201 K2-P3
725 A2-B2-E2-K2-Hg-P3	202 A2-B2-E2-K2
725 A2-B2-E2-K2-P3	202 A2-B2-E2-P3 R
725 A2-B2-P3	202 A2-B2-P3 R
725 A2-P3	202 A2-P3
725 B2-E2	202 AX
725 B2-K2	202 B2-P3
725 B2-P3	202 E2-P3
725 K2	203 A2-B2-E2-K2-Hg-P3 RD
725 K2-P3	203 A2-B2-E2-K2-P3
725 P3	203 AX-P3
100 K2	203 UP3 A2-B2-E2-K2-Hg-CO-NO-P3
100 LD P3 R	205 A2-B2-E2-K1-P3 FORMALDEHYDE
100 P3	205 A2-B2-E2-K1-P3 RD CBRN PS
103 A1-P3	205 A2-B2-E2-K1-P3 RD REACTOR
200 A2	205 A2-P3 RD REACTOR (jodometan)
200 LBR A2	

### Suitable for use in explosive atmospheres (ATEX)

Ideal for working in polluted atmospheres where the proportion of oxygen in the air is higher than 19.5% by volume. The mask is compatible with canisters, particulate filters and filter canisters that have a standard connection thread in accordance with EN 148/1.

### Comfortable and super-durable

The mask body is made of thermoplastic rubber. It has five-point head straps that make it easy to put on the mask and stabilize it on the head. The inner mask is made of thermoplastic rubber and equipped with two inhalation valves. The mask has a panoramic polycarbonate visor that provides a wide field of vision. It is impact- and scratch-resistant and provides impact resistance to particles released at 120 m/s. For ease of use, it has a carrying strap made of flame-resistant PVC for hanging the mask around the neck during work breaks.

### Packaging:

Package dimensions: 250/200/140 mm

Dimensions of collecting carton: 730/560/480 mm

Net mask weight: 0,580 g

Gross weight of master carton: 20 kg

Number of masks in master carton: 24 pcs.



# OxyPRO X8

EN 136:1998

## Head strap adjustment

Wide head straps

## Panoramic viewfinder

## Internal ventilation system

## Exhaust membrane cover

Available in S, M, L

## Lightweight and comfortable

A high-quality full-face mask Oxyline X8 in combination with properly selected filtering elements provides effective protection of the face and respiratory tract against harmful effects of substances in the form of aerosols (dust, smoke, mist), vapours and gases or both these factors simultaneously. When designing Oxyline X8 mask we focused on ergonomics and high comfort of use. It is ensured by low weight of the mask (414 g) and appropriately shaped visor with a wide field of view, which does not disturb the image even in its lower part. Thanks to low bayonet connectors, the cleansing elements do not obstruct visibility. This design ensures that the mask is properly balanced, reducing the discomfort associated with strenuous work.

## Packaging:

Package dimensions: 250/210/155 mm  
Dimensions of the collection carton: 425/315/280 mm  
Net mask weight: 414 g  
Gross weight of master carton: 1.66 kg  
Number of masks in master carton: 4 pcs.

The wide sealing strip allows the mask to fit well mask to the face, and its porous structure prevents it from slipping during operation.

- The Oxyline X8 mask is offered in two sizes:

M and L. This gives you the opportunity to perfectly adjust the mask to the size and shape of the face.

- Four-point adjustable head straps allow you to easy and fast to put on the mask and its ergonomic shape ensures a stable position on the head while working.

- The large, panoramic visor is scratch-resistant, and the internal ventilation system prevents fogging.

- Combined with a wide range of elements. cleansing Oxyline X8 mask offers effective protection and comfortable use.

# OxyPRO X6

EN 140

Head strap adjustment

Half mask size marking

Exhaust membrane cover

Quick release system of the respirator

Available in S, M, L

## Ergonomic shape

The X6 series gas half mask is made of TPR thermoplastic rubber. It is used with two purifying elements. The respirator is made of three basic components: rigid body, soft face piece and carrying elements. The combination of rubber and plastic ensures proper wearing comfort and high durability of the product. The shape of the respirator makes it possible to use eye protection. Series X6 respirators are available in sizes S, M and L.

## Restrictions and storage

Do not use in an environment where the oxygen concentration is less than 19.5% and in the presence of unknown gases. Store in the original packaging with the instructions, without connected purification components at a temperature of -20°C to +30°C and humidity RH<80%. Protect from direct sunlight.

## Comfortable and super-durable

The three-stage adjustment of the headpiece and the possibility of smooth lowering the half-mask without the necessity to take off the head protection make it comfortable. Evenly distributed weight on the user's face ensures comfort and tight fit, so the respirator perfectly maintains its position while performing various activities.

## Packaging:

Dimensions of the collection carton: 500/455/165 mm  
Net weight of respirator: 150 g  
Gross weight of master carton: 3 kg  
Number of masks in master carton: 20 pcs

# OxyPRO X7

EN 140


## Head strap adjustment

## Half mask size marking

## Exhaust membrane cover

## Quick release system of the respirator

## Available in S, M, L

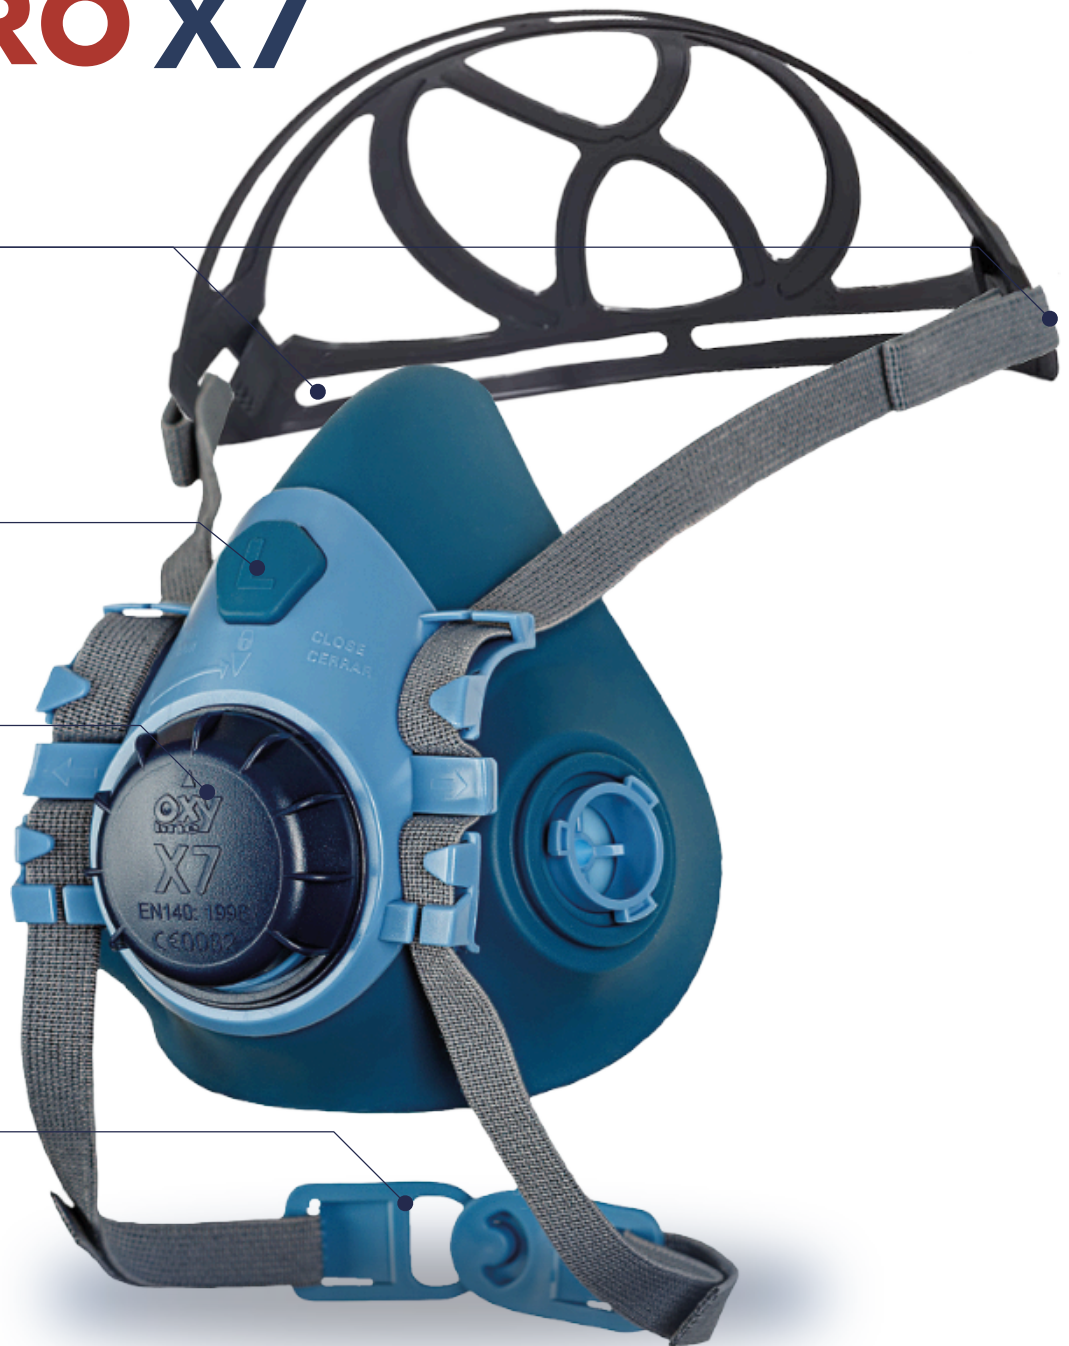

### Ergonomic shape

Comfortable reusable half mask against gas X7 series is designed for work with two purifying elements. It provides respiratory protection against a wide range of harmful compounds, vapours and dust. The X7 respirator consists of three main components: a rigid body, an extremely soft facepiece and supporting elements. The fitted, ergonomic shape ensures optimal vision. The respirator is compatible with eye protection equipment. For a better fit, our X7 series respirators are available in sizes: S, M and L.

### Restrictions and storage

Do not use in an environment where the oxygen concentration is less than 19.5% and in the presence of unknown gases. Store in the original packaging with instructions, without connected purification components at a temperature of -20°C to +30°C and humidity RH<80%. Protect from direct sunlight.

### Comfortable and super-durable

The X7 series respirator is characterised by high resistance and durability. The evenly distributed weight on the user's face ensures comfort and tight fit, so the respirator perfectly maintains its position while performing various activities. The mask's headgear is 4-point adjustable and the fastening tapes are routed in such a way as to allow the mask to be lowered without removing the protective helmet. The respirator allows for easy access and quick inspection of the breathing membrane by removing the cover of the exhalation component.

### Packaging:

Dimensions of the collection carton: 500/455/165 mm  
Net weight of respirator: 150 g  
Gross weight of master carton: 3 kg  
Number of masks in master carton: 20 pcs



## AGRO BASIC SET



Half mask **X6**  
(TPR rubber)

+



Filter **X703 ABEK1**  
(pair)

+



Pre-filter for dust  
**X7N11 P2 R D**  
(2 pairs)

+



Pre-filter cover  
absorbers **X501**  
(pair)

REFERENCE CODE	SIZE
ZX6SABEK17N11P2-w	S
ZX6MABEK17N11P2-w	M
ZX6LABEK17N11P2-w	L

## AGRO BASIC+ SET



Half mask **X7**  
(silicon)

+



Filter **X703 ABEK1**  
(pair)

+



Pre-filter for dust  
**X7N11 P2 R D**  
(2 pairs)

+



Pre-filter cover  
absorbers **X501**  
(pair)

REFERENCE CODE	SIZE
ZX7SABEK17N11P2-w	S
ZX7MABEK17N11P2-w	M
ZX7LABEK17N11P2-w	L

## AGRO STANDARD SET



Half mask **X6**  
(TPR rubber)

+



Filter **X703 ABEK1**  
(pair)

+



Pre-filter for dust  
**T-BM P3 R**  
(2 pairs)

+



Pre-filter cover  
absorbers **X520**  
(pair)

REFERENCE CODE	SIZE
ZX6SABEK1TBMP3-w	S
ZX6MABEK1TBMP3-w	M
ZX6LABEK1TBMP3-w	L

## AGRO STANDARD+ SET



Half mask **X7**  
(silicon)

+



Filter **X703 ABEK1**  
(pair)

+



Pre-filter for dust  
**T-BM P3 R**  
(2 pairs)

+



Pre-filter cover  
absorbers **X520**  
(pair)

REFERENCE CODE	SIZE
ZX7SABEK1TBMP3-w	S
ZX7MABEK1TBMP3-w	M
ZX7LABEK1TBMP3-w	L

## GRINDER BASIC SET



Half mask **X6**  
(TPR rubber)

+



Pre-filter for dust  
**T-BM P3 R**  
(2 pairs)

REFERENCE CODE	SIZE
ZX6STBMP3-w	S
ZX6MTBMP3-w	M
ZX6STBMP3-w	L

## GRINDER BASIC+ SET



Half mask **X7**  
(silicon)

+



Pre-filter for dust  
**T-BM P3 R**  
(2 pairs)

REFERENCE CODE	SIZE
ZX7STBMP3-w	S
ZX7MTBMP3-w	M
ZX7STBMP3-w	L

## GRINDER STANDARD SET



Half mask **X6**  
(TPR rubber)

+



Filter **X793C P3 R**  
(pair)

REFERENCE CODE	SIZE
ZX6S793C-w	S
ZX6M793C-w	M
ZX6L793C-w	L

## GRINDER STANDARD+ SET



Half mask **X7**  
(silicon)

+



Filter **X793C P3 R**  
(pair)

REFERENCE CODE	SIZE
ZX7S793C-w	S
ZX7M793C-w	M
ZX7L793C-w	L

## CHEMIC BASIC SET



Half mask **X6**  
(TPR rubber)

+



Filter **X703 ABEK1**  
(pair)

REFERENCE CODE	SIZE
ZX6SABEK1-w	S
ZX6MABEK1-w	M
ZX6LABEK1-w	L

## CHEMIC BASIC+ SET



Half mask **X7**  
(silicon)

+



Filter **X703 ABEK1**  
(pair)

REFERENCE CODE	SIZE
ZX7SABEK1-w	S
ZX7MABEK1-w	M
ZX7LABEK1-w	L



## CHEMIC PRO SET



Half mask **X6**  
(TPR rubber)

+



Filter **X70926ABEK1P3 R D**  
(pair)

REFERENCE CODE	SIZE
ZX6SABEK1-w	S
ZX6MABEK1-w	M
ZX6LABEK1-w	L

## CHEMIC PRO+ SET



Half mask **X7**  
(silicon)

+



Filter **X70926ABEK1P3 R D**  
(pair)

REFERENCE CODE	SIZE
ZX7SABEK1-w	S
ZX7MABEK1-w	M
ZX7LABEK1-w	L

## PAINTER BASIC SET



Half mask **X6**  
(TPR rubber)

+



Filter **X701 A1**  
(pair)

+



Pre-filter for dust  
**X7N11 P2 R D**  
(2 pairs)

+



Pre-filter cover  
absorbers **X501**  
(pair)

REFERENCE CODE	SIZE
ZX6SA17N11P2-w	S
ZX6MA17N11P2-w	M
ZX6LA17N11P2-w	L

## PAINTER BASIC+ SET



Half mask **X7**  
(silicon)

+



Filter **X701 A1**  
(pair)

+



Pre-filter for dust  
**X7N11 P2 R D**  
(2 pairs)

+



Pre-filter cover  
absorbers **X501**  
(pair)

REFERENCE CODE	SIZE
ZX7SA17N11P2-w	S
ZX7MA17N11P2-w	M
ZX7LA17N11P2-w	L

## PAINTER EXPERT SET



Half mask **X6**  
(TPR rubber)

+



Filter **X70523A2P3 R D**  
(pair)

REFERENCE CODE	SIZE
ZX6SA2P3-w	S
ZX6MA2P3-w	M
ZX6LA2P3-w	L

## PAINTER EXPERT SET



+



Half mask **X7**  
(silicon)

Filter **X70523A2P3 R D**  
(pair)

REFERENCE CODE	SIZE
ZX7SA2P3-w	S
ZX7MA2P3-w	M
ZX7LA2P3-w	L

## PAINTER STANDARD SET



+



+



+



Half mask **X6**  
(TPR rubber)

Filter **X705 A2**  
(pair)

Pre-filter for dust  
**X7N11 P2 R D**  
(2 pairs)

Pre-filter cover  
absorbers **X501**  
(pair)

REFERENCE CODE	SIZE
ZX6SABEK17N11P2-w	S
ZX6MABEK17N11P2-w	M
ZX6LABEK17N11P2-w	L

## PAINTER STANDARD+ SET



+



+



+



Half mask **X7**  
(silicon)

Filter **X705 A2**  
(pair)

Pre-filter for dust  
**X7N11 P2 R D**  
(2 pairs)

Pre-filter cover  
absorbers **X501**  
(pair)

REFERENCE CODE	SIZE
ZX7SABEK17N11P2-w	S
ZX7MABEK17N11P2-w	M
ZX7LABEK17N11P2-w	L

## ASBESTOP SET



+



Half mask **X6**  
(TPR rubber)

Filter **X793 P3 R**  
(3 pairs)

REFERENCE CODE	SIZE
ZX6S3793P3-w	S
ZX6M3793P3-w	M
ZX6L3793P3-w	L

## ASBESTOP+ SET



+



Half mask **X7**  
(silicon)

Filter **X793 P3 R**  
(3 pairs)

REFERENCE CODE	SIZE
ZX7S3793P3-w	S
ZX7M3793P3-w	M
ZX7L3793P3-w	L

# Filter and absorber elements

Our filters, capsule filters, capsule filters, prefilters and accessories are compatible with X6, X7 and X8.

## X701 A1

Filter  
EN 14387



REFERENCE CODE	FOIL	CARTON
OXY-X701A1-02	1 pair	30 pairs

## X702 A1E1

Filter  
EN 14387



REFERENCE CODE	FOIL	CARTON
OXY-X702A1E1-02	1 pair	30 pairs

## X703 ABEK1

Filter  
EN 14387



REFERENCE CODE	FOIL	CARTON
OXY-X703ABEK1-02	1 pair	30 pairs

## X705 A2

Filter  
EN 14387



REFERENCE CODE	FOIL	CARTON
OXY-X705A2-02	1 pair	30 pairs

## X705Lt A2

Filter  
EN 14387



REFERENCE CODE	FOIL	CARTON
OXY-X705LTA2	1 pair	30 pairs

## X704 K1

Filter  
EN 14387



REFERENCE CODE	FOIL	CARTON
OXY-X704K1-02	1 pair	30 pairs

## X70926 ABEK1P3 R D

Filter  
EN 14387



REFERENCE CODE	FOIL	CARTON
OXY-X70926ABEK1P3 R D-02	1 pair	30 pairs

## X70923 A1E1P3 R D

Filter  
EN 14387



REFERENCE CODE	FOIL	CARTON
OXY-X70923A1E1P3RD-02	1 pair	30 pairs

## X70523 A2P3 R D

Filter  
EN 14387



REFERENCE CODE	FOIL	CARTON
OXY-X70523A2P3RD-02	1 pair	30 pairs

## X78099 A2B2E2K2HgP3

Filter  
EN 14387  
Only for  
X8



REFERENCE CODE	FOIL	CARTON
OXY-X78099A2B2E2K2HGP3-02	1 pair	15 pairs

## X78098 AXP3

Filter  
EN 14387  
Only for  
X8



REFERENCE CODE	FOIL	CARTON
OXY-X78099A2B2E2K2HGP3-02	1 pair	15 pairs

## Filter color designations:

- A** Organic vapors, solvents with a boiling point > 65°C
- B** Inorganic gases and vapors (chlorine, hydrogen sulfide, hydrogen cyanide)
- E** Sulfur dioxide
- K** Ammonia and organic ammonia derivatives
- P** Particles (dusts and aerosols)



# Filters

Our filters, capsule filters, capsule filters, prefilters and accessories are compatible with X6, X7 and X8.

## X793 P3 R

Capsule filter  
EN 143



REFERENCE CODE	FOIL	CARTON
OXY-X793P3R-02	1 pair	72 pairs

## X793C P3 R

Capsule filter  
EN 143



REFERENCE CODE	FOIL	CARTON
OXY-X793CP3R-02	1 pair	72 pairs

## T-BM P3 R

Filter with an additional  
layer of activated carbon.  
EN 143



REFERENCE CODE	FOIL	CARTON
TBMP3R-103	1 pair	20 pairs

## T-BM P2 R

Filter with an additional  
layer of activated carbon.  
EN 143



REFERENCE CODE	FOIL	CARTON
TBMP2R-103	1 pair	20 pairs

## T-BM A P3 R


Filter with an additional  
layer of activated carbon.  
EN 143



REFERENCE CODE	FOIL	CARTON
TBMAP3R-103	1 pair	20 pairs

## T-BM A P2 R

Filter with an additional  
layer of activated carbon.  
EN 143



REFERENCE CODE	FOIL	CARTON
TBMAP2R-103	1 pair	20 pairs

## X2000-AG P3 R

Filter with an additional  
layer of activated carbon.  
EN 143



REFERENCE CODE	FOIL	CARTON
OXY-X2000AGP3R	1 pair	50 pairs

## X7N11 P2 R D

Prefilter  
EN 14387



REFERENCE CODE	FOIL	CARTON
OXY-X7N11P2R-04	2 pair	100 pairs

## X7N13 P3 D

Prefilter  
EN 14387



REFERENCE CODE	FOIL	CARTON
OXY-X7N13P3D-04	2 pair	100 pairs

## X602

Adapter for prefilter



Filter element **X7N13 P3 D** for self-assembly on a mask or half mask.

REFERENCE CODE	FOIL
OXY-X602	1 pair

## X501

Prefilter cover



Combines with absorbers X701 A1, X702 A1E1, X703 ABEK1, X705 A2, so it can work with **X6** and **X7** series half masks and **X8** series full-face masks.

REFERENCE CODE	BOX	CARTON
OXY-X501-20	20 pcs	200 pcs

## X520

Absorber cap



Used to connect absorbers X701 A1, X702 A1E1, X703 ABEK1 and X705 A2 with particulate filters T-BM P2 R, T-BM A P2 R, T-BM P3 R, T-BM A P3 R, X2000-0V P3 R, X2000-AG P3 R, X793 P3 R, X793C P3 R.

REFERENCE CODE	BOX	CARTON
OXY-X520-20	20 pcs	200 pcs



1



2



3



4




5



6



7



8



9



10

## Order codes:

1. OXY-FFP610 - viewfinder

2. OXY- FFS602 - inner face

3. OXY-FFS613 - main seal

4. OXY-FFP608 - exhaust valve cover

5. OXY-FFS605 - exhaust diaphragm

6. OXY-FFP615 - inspiratory membrane

7. OXY-FFS614 - bayonet connector gasket

8. OXY-FOFFP610 - protective film for the viewfinder

9. OXY-FFP611 - viewfinder frame

10. OXY-FFS601 - four-point head strap



- **OXYPRO BASKET RACK**

The OxyPRO basket rack consists of one basket and hooks.

Dimensions: 226x60x52cm

- **OXYPRO CASE**

**OXYPRO CASE** consists of a foam profiled for OxyPRO products and a foam top.

Dimensions: 155x450x360mm





# Filtering Half Masks

EN 149:2001+A1:2009

## X 310 SV FFP3 R D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



## X 310 SV FFP3 NR D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



## X 310 SV FFP3 NR D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Absorbent sealing
- For the food industry
- Exhalation valve



## XS 310 V FFP3 R D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



## XS 310 V FFP3 R D **NEW!**

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve
- High Visibility

**FLASH**



## XS 310 FFP3 R D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Absorbent sealing



## X 310 FFP3 NR

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Compliant with: 14683:2019+AC:2009
- TYPE: II R



## X 320 SV FFP3 R D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Absorbent sealing
- Detachable belt
- Exhalation valve



## X 320 SV FFP3 R D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Absorbent sealing
- Detachable belt
- Exhalation valve



Respirators without exhalation valve are designed mostly for work not requiring material physical effort.

# Filtering Half Masks

EN 149:2001+A1:2009

## X 210 V FFP2 R D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



## X 210 SV FFP2 R D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



## X 210 V FFP2 NR D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Absorbent sealing
- For the food industry
- Exhalation valve



## X 200 FFP2 R D

- Protection up to **10 x OEL**



## X 110 FFP1 R D

- Protection up to **4 x OEL**
- Adjustable the length of the head harness straps



## X 110 V FFP1 R D

- Protection up to **4 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



## X 100 FFP1 R D

- Protection up to **4 x OEL**



## X 100 V FFP1 R D

- Protection up to **4 x OEL**
- Exhalation valve



Respirators without exhalation valve are designed mostly for work not requiring material physical effort.

# Filtering Half Masks

EN 149:2001+A1:2009

## XC 110 V FFP1 R D

- Protection up to **4 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



**ACTIVE CARBON**


## XF 110 V FFP1 NR D

- Protection up to **4 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



## XC 210 V FFP2 R D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve

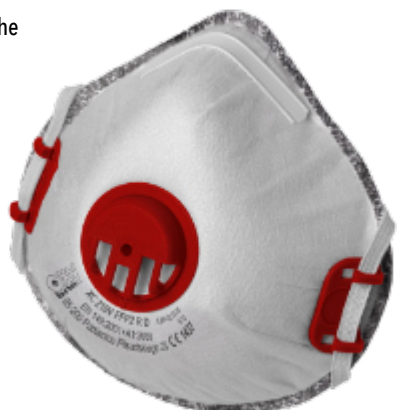

**ACTIVE CARBON**

## XF 250 V FFP2 NR D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



## XCS 310 V FFP3 R D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- The inner sealing insert made of polyurethane, to improve the seal and fit to the face
- Exhalation valve



**ACTIVE CARBON**

## XF 350 V FFP3 NR D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve



Respirators without exhalation valve are designed mostly for work not requiring material physical effort.



## Filtering Half Masks

EN 149:2001+A1:2009

### XA 200 FFP2 NR D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Precise sealing of the nose cap



### XA 300 FFP3 NR D

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Precise sealing of the nose cap



### XA 200 V FFP2 NR D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Precise sealing of the nose cap
- Exhalation valve
- For the food industry



Also available in blue

### XA 300 V FFP3 NR D

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Precise sealing of the nose cap
- Exhalation valve
- For the food industry



Also available in blue

Respirators without exhalation valve are designed mostly for work not requiring material physical effort.

# Filtering Half Masks

EN 149:2001+A1:2009

## XR 250 FFP2 NR



### MEDICAL DEVICE

- **Oxyline** halfmask flat fold 3 - Panels
- **FFP2** - EN 149:2001+A1:2009
- **Medical Product TYPE: II R**
- EN 14683:2019+AC:2009
- A model to enhance work safety
- With ear elastics

#### Product code for order:

White - **XR250FFP2NR-W**

Black - **XR250FFP2NR-B**

## XR 350 FFP3 NR



### MEDICAL DEVICE

- **Oxyline** halfmask flat fold 3 - Panels
- **FFP2** - EN 149:2001+A1:2009
- **Medical Product TYPE: II R**
- EN 14683:2019+AC:2009
- A model to enhance work safety
- With ear elastics

#### Product code for order:

White - **XR350FFP2NR-W**

Black - **XR350FFP2NR-B**

## DONALD FFP2 NR D



### MEDICAL DEVICE

- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Compliant with:  
14683:2019+AC:2009  
TYPE: II R

## DONALD V FFP2 NR D



- Protection up to **10 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve

## DONALD FFP3 NR D



### MEDICAL DEVICE

- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Compliant with:  
14683:2019+AC:2009  
TYPE: II R

## DONALD V FFP3 NR D



- Protection up to **30 x OEL**
- Adjustable the length of the head harness straps
- Exhalation valve

Respirators without exhalation valve are designed mostly for work not requiring material physical effort.

# Ways of packing half masks

NUMER	SHAPE	MODEL	RETAIL BOX			RETAIL COLOR FOIL		ADDITIONAL INFORMATION
			TRANSPARENT FOIL (PCS.)	BOX (PCS.)	CARTON (PCS.)	COLOR FOIL (PCS.)	CARTON (PCS.)	
1	CUP	X 310 FFP3 NR (Medical type II R)	1	5, 10	300	3	300	1 EP (Euro Pallet) = 12-16 cartons more about packing in agenda at below *medical device certified also with EN 14683
2	CUP	X 310 SV FFP3 R D	1	5, 10	300, 360	3	300	1 EP=12-16 cartons Masks available also in version NR
3	CUP	XS 310 V FFP3 R D	1	5, 10	300, 360	3	300	1 EP=12 cartons Masks available also in version NR
4	CUP	XCS 310 V FFP3 R D (Active carbon)	1	8	288	—	—	1 EP=12 cartons Masks available also in version NR
5	CUP	X 320 SV FFP3 R D	1	5, 10	300, 360	3	300	1 EP=12-16 cartons Masks available also in version NR
6	CUP	X 320 SV FFP3 R D (Black)	1	10	360	—	—	1 EP=12 cartons Masks available also in version NR
7	CUP	X 310 SV FFP3 NR D (Blue)	1	5, 10	300, 360	3	300	1 EP=12-16 cartons *Recommended for food industry/detachable
8	FLAT FOLDED	XF 310 V FFP3 NR D	—	12	432	—	—	1 EP=12-16 cartons (Flat folded VERTICAL)
9	FLAT FOLDED	DONALD FFP3 NR D	1	2	360	—	—	1 EP=12-16 cartons (Flat folded HORIZONTAL)
10	FLAT FOLDED	DONALD V FFP3 NR D	1	20	320	—	—	1 EP=12-16 cartons (Flat folded HORIZONTAL)
11	FLAT FOLDED 3-PANELS	XR 350 FFP2 NR	1	20	960	—	—	1 EP=12-16 cartons*Medical device certified also with EN 14683
12	CUP	X 200 FFP2 R D	—	15, 20	540, 600	3	300	1 EP=12-16 cartons Masks available also in version NR
13	CUP	X 200 V FFP2 R D	—	10	360	3	300	1 EP=12-16 cartons Masks available also in version NR
14	CUP	X 210 FFP2 NR D (Medical type II R)	—	10	360	3	300	1 EP=12-16 cartons *Medical device certified also with EN 14683
15	CUP	X 210 V FFP2 R D	—	10	360	3	300	1 EP=12-16 cartons Masks available also in version NR
16	CUP	X 210 SV FFP2 R D	—	10	360	3	300	1 EP=12-16 cartons Masks available also in version NR
17	CUP	X 200 V FFP2 NR D (Blue)	—	10	360	3	300	1 EP=12-16 cartons
18	CUP	XC 210 V FFP2 R D (Active carbon)	1	8	288	3	300	1 EP=12-16 cartons Masks with Active Carbon layer
19	FLAT FOLDED	XF 210 V FFP2 NR D	—	12	432	—	—	1 EP=12-16 cartons
20	FLAT FOLDED	DONALD FFP2 NR D (Medical type II R)	1	20	320	—	—	1 EP=12-16 cartons *Medical device certified also with EN 14683
21	FLAT FOLDED	DONALD V FFP2 NR D	1	20	320	—	—	1 EP=12-16 cartons
22	FLAT FOLDED 3-PANELS	XR 250 FFP2 NR	1	20	960	—	—	1 EP=12-16 cartons *Medical device certified also with EN 14683
23	CUP	X 100 FFP1 R D	—	15, 20	540, 600	3	300	1 EP=12-16 cartons Masks available also in version NR
24	CUP	X 100 V FFP1 R D	—	10	500	3	300	1 EP=12-16 cartons Masks available also in version NR
25	CUP	X 110 FFP1 R D	—	10	360	3	300	1 EP=12-16 cartons Masks available also in version NR
26	CUP	X 110 V FFP1 R D	—	10	360	3	300	1 EP=12-16 cartons Masks available also in version NR
27	CUP	XC 110 V FFP1 R D (Active carbon)	1	8	288	3	300	1 EP=12-16 cartons Masks with Active Carbon layer
28	FLAT FOLDED	XF 110 V FFP1 NR D	—	12	432	—	—	1 EP=12-16 cartons Flat folded HORIZONTAL



## JE BASIC 03+

EN 361:2002

EN 355:2002

EN 362:2004



**100201**

Safety harness model 100201 with a D-ring chest harness buckle on the chest strap for fall arrest systems, a dorsal harness buckle for fall arrest systems, and 1/2 A x2 auxiliary harness loops on the shoulder straps for fall arrest systems. Made of polyester webbing properly stitched together with contrasting threads, connecting to each other with metal buckles. The harness has adjustable length of shoulder straps and thigh straps.

+



**300201**

Safety shock absorber model 300201, made of polyester webbing, ending in loops at both ends. The body of the shock absorber is protected by a polyethylene cover. The Y-type rope is attached to the shock absorber on one end, and on the other it is equipped with hook loops with hook snaps for scaffolding work. The Y-type safety rope is made of: polyamide core rope with a diameter of 12 mm, length of 1,80 m terminated with sewn-in loops

+



**510017**

510017 oval screw-losing connector are made of 35CrMo steel, opening gate 18mm

+



Bag to protect the kit from dirt and for transportation.

### Packaging:

The originally packed set is delivered in a blister pack with instructions for use and inspection cards

## JE BASIC 02+

EN 361:2002

EN 355:2002

EN 362:2004



**JE1058**

Safety harness 10058 (JE1058) with dorsal attachment point D-ring and with sternal attachment point, by loops. Harness is made of polyamide band stapled with contrasting thread, using metal buckles connect with each other. The safety harness has a regulation of the length of the thighstraps (size L-XXL)

+



**JE3008**

Energy absorbing lanyard model 300008 (JE3008) with energy absorber polyamide band 44mm wide and kernmantle rope a diameter 12mm, kit total length 185 cm

+



**JE5017**

510017 (JE5017) oval screw-losing connector are made of 35CrMo steel, opening gate 18mm

+



Protective bag

### Packaging:

The originally packed set is delivered in a blister pack with instructions for use and inspection cards.  
1 set/10 sets per carton/ 260 set per pal

# OxyChem C110/ C110B

Protective coverall, Cat. III, Type 5, 6  
Protection compliant with standards

## TYPE 6



EN13034:2005  
+A1:2009

## TYPE 5



EN ISO 13982:2004  
+A1:2010

Particulate  
radioactive  
contamination  
(no radiation)



EN1073-2:2002

Requirements for  
anti-static clothing



EN1149-5:2018

Protection of  
general clothing



EN ISO 13688:2013

## Lightweight and tough

OxyChem C110 provides limited Type 5/6 chemical protection and is made from a 55g/m<sup>2</sup> "breathable" Spunbond-Meltblown-Spunbond (SMS) nonwoven polypropylene fabric which results in a much more comfortable working environment. OxyChem C110 also provides protection against radioactive dust and has anti-electrostatic properties. Its construction has been designed to provide the user with the highest possible level of safety, ergonomics and comfort when working.

## Example of application:

- Painting
- Plastering
- Bricklaying
- Demolition work
- Asbestos work
- Working with wood and plastic
- Grinding (e.g. plaster sanding)
- Cleaning, housekeeping
- Stone work
- Attic insulation with mineral wool
- Glass fibre processing
- In the pharmaceutical industry

## Properties:

- Spunbond-Meltblown-Spunbond (SMS) material Non-woven polypropylene, 55g/m<sup>2</sup>.
- Three-panel hood
- Two-way zipper with flap covering the express
- Two-piece cut in the crotch
- Elastic cuffs, legs, waist and hood
- Elastic thumb loop - Durable overlock stitching on the inside
- Colour: white, blue



Spunbond


Meltblown

Spunbond

Material



Comfortable three-panel hood



Two-piece cut at the crotch



Two-way zipper zipper with a flap covering the express



Elastic loop for thumb

# OxyChem C210

Protective coverall, Cat. III, Type 5, 6. Medical Device Class I  
Protection compliant with standards

Type 6 - Protective clothing  
against liquid chemicals -  
low-pressure splashes



EN13034:2005  
+A1:2009

Type 5 - Protective  
clothing against solid  
particles



EN ISO 13982-1:2004  
+A1:2010

Protective clothing  
against radioactive  
contamination



EN1073-2:2002

Electrostatic  
properties



EN1149-5:2018

Protection  
against  
infectious agents

EN14126:2003  
+AC:2004

Protection of  
general clothing



EN ISO 13688:2013

## Lightweight and tough

The OxyChem C210 protective suit is designed for protection in It is designed to provide protection in areas exposed to infectious materials and provides limited type 5/6 anti-chemical protection. It is made of non-woven fabric laminated with a microporous film (MPFL) of 65g/m<sup>2</sup>. Outer layer: polyethylene film. Inner layer: polypropylene fibres. Non-woven fabric (MPFL) is resistant to permeation infectious agents. OxyChem C210 also provides protection against radioactive contamination and has anti-electrostatic properties. Its construction is designed to provide the wearer with the highest level of safety, ergonomics and comfort during work.

## Example of application:

- When working with asbestos
- When painting and spray-painting
- When laying insulation and earthworks
- When working on water supply systems, in sewers
- In the pharmaceutical industry
- When working with resin
- Machine maintenance
- During light spraying work, e.g. in agriculture
- In the automotive industry
- Grinding and polishing
- In the pharmaceutical and medical industries

## Properties:

- Spunbond fabric laminated with microporous film (MPFL), 65g/m<sup>2</sup>
- Three-panel hood
- Two-way zip with fabric patch
- Two-piece crotch cut
- Elastic cuffs, legs, waist and hood
- Elastic thumb loop
- Durable overlock seams on the inside

MEDICAL DEVICE




MPFL  
MATERIAL

Material



Comfortable three-panel hood



Two-piece cut at the crotch



Two-way zipper zipper with a flap covering the express



Elastic loop for thumb

# OxyChem C250

## Protective coverall, Cat. III, Type 5, 6

Protection compliant with standards

**Type 6** - Protective clothing against liquid chemicals - low-pressure splashes



EN13034:2005 +A1:2009

**Type 5** - Protective clothing against solid particles



EN ISO 13982:2004 +A1:2010

Protective clothing against radioactive contamination



EN 1073-2:2002

Electrostatic properties



EN 1149-5:2018

Protection against infectious agents

EN 14126:2003 +AC:2004

Protection of general clothing



EN 13688:2013

### Lightweight and tough

The OxyChem C250 provides limited chemical protection type 5/6. It is made of fabric laminated with microporous film (MPFL) of 63g/m<sup>2</sup>. Outer layer: polyethylene film. Inner layer: polypropylene fibres, which is resistant to infectious agents penetration. The "breathable" panel is made of Spunbond Meltblown-Spunbond (SMS) non-woven polypropylene fabric with a weight of 55g/m<sup>2</sup>. OxyChem C250 also provides protection against radioactive dust and has anti-electrostatic properties. Its construction is designed to provide the user with the highest possible level of safety, ergonomics and comfort during work.

### Examples of application:

- Work with asbestos
- Painting and spray-painting
- Insulation laying, ground work
- Work on water pipes, in sewers
- Pharmaceutical industry
- Maintenance of machinery
- Light spraying, agriculture
- Automotive, cleanrooms
- Grinding, polishing
- Work in the pharmaceutical industry

### Properties:

- Spunbond fabric laminated with microporous film (MPFL) 63g/m<sup>2</sup> + (SMS) 55g/m<sup>2</sup> "breathable panel"
- Two-way zip with adhesive patch
- Two-piece cut in the crotch
- Elastic ribbing on cuffs, legs, waist and hood
- Elastic thumb loop
- Durable overlock seams on the inside




SMS  
Back panel  
Breathable

MPFL  
MATERIAL

Material



Comfortable three-panel hood



Two-piece cut at the crotch



Two-way zipper zipper with a flap covering the express



Elastic loop for thumb

# OxyChem C310

## Protective coverall, Cat. III, Type 5, 6. Medical Device Class I

Protection compliant with standards

**Type 6** - Protective clothing against liquid chemicals - low-pressure splashes



EN13034:2005 +A1:2009

**Type 5** - Protective clothing against solid particles



EN ISO 13982-1:2004 +A1:2010

**Type 4** - Protective clothing against liquid chemicals - Spray liquid



EN 14605:2005 +A1:2009

Protective clothing against radioactive contamination



EN 1073-2:2002

Electrostatic properties



EN 1149-5:2018

Protection against infectious agents

EN 14126:2003 +AC:2004

Protection of general clothing



EN ISO 13688:2013

### Lightweight and tough

The OxyChem C310 protective suit is designed for protection in areas exposed to infectious material and provides limited chemical protection type 4/5/6. It is also a component of the Individual Biological Protection Kit (IZOB), created in accordance with the WHO recommendation. It is made of non-woven fabric laminated with microporous film (MPFL) of 65g/m<sup>2</sup>. Outer layer: polyethylene film. Inner layer: polypropylene nonwoven fabric. Non-woven fabric (MPFL) is resistant to infectious agents penetration. OxyChem C310 also provides protection against radioactive contamination and has anti-electrostatic properties. Its construction is designed to provide the wearer with the highest level of safety, ergonomics and comfort during work.

### Examples of application:

- In the pharmaceutical industry
- In contact with toxic materials
- When securing crime scenes
- In veterinary medicine
- In hospitals
- When working with sick people, e.g. during a pandemic
- When working with asbestos
- When painting and spray-painting

### Properties:

- Spunbond laminated with microporous film (MPFL), 65g/m<sup>2</sup>
- Additionally taped seams
- Three-panel hood
- Two-way zip with self-fabric patch
- Two-piece cut in the crotch
- Elastic ribbing on cuffs, legs, waist and hood
- Elastic thumb loop
- Durable overlock seams on the inside, taped on the outside with blue tape

MEDICAL DEVICE




MPFL  
MATERIAL

TAPED  
SEAMS

Material



Comfortable three-panel hood



Two-piece cut at the crotch



Two-way zipper zipper with a flap covering the express



Elastic loop for thumb





The **OxyLac** suit, thanks to its increased protective properties, the **OxyLac** suit provides even better protection against dirt, dust, aerosols, grime.

## Properties:

- One hundred percent (MPFL) 55g/m<sup>2</sup> polypropylene material (coated with microporous film) increases its strength and resistance to external factors
- Ergonomic hood
- Extended zipper cover
- Elastic cuffs on hood, wrists and legs for a better seal
- Drawstring waist for a better fit and increased comfort



Ergonomic hood



Drawstring waist

The **KPP40** suit guarantees an adequate level of protection to the wearer in the part covered by the suit against hazards caused by non-toxic dusts, non-toxic solids and similar non-toxic wastes and against light physical hazards such as abrasions, scratches etc. and small splashes of non-toxic liquids. This PPE should not be used for other types of hazards.

## Properties:

- Material 100% polypropylene (PP) 40 g/m<sup>2</sup>(white)
- Hood
- Zipper
- Elastic ribbing on cuffs, legs, waist and hood
- Durable overlock stitching on the inside

## Examples of application OxyLac i KPP40:

- Painting
- Repair and construction work
- Repair and maintenance of machinery and equipment
- Protection against dusts and non-hazardous substances
- Application of industrial coatings
- Inspection of workplaces (visitor suit)
- Pharmaceutical and medical industry
- Cleaning
- Disinfection

# ONBW 50

## High-boot cover

### Properties

- Made of barrier material - non-woven fabric laminated with (MPFL) microporous film 65g/m2

**External layer:** polyethylene film

**Inner layer:** polypropylene unwoven fabric

- Elastic legs to fit the leg
- Straps to prevent slipping - increasing comfort of use
- Colour: white

### Examples of application:

- Painting
- Repair and construction work
- Repair and maintenance of machinery and equipment
- Protection against dusts and non-hazardous substances
- Application of industrial coatings
- Inspection of workplaces (visitor guards)
- Garden work
- Cleaning work
- Protection of clothing

### Packing:

Quantity per carton: 50 pairs (100 pcs.)

Carton dimensions: 43cm x 30cm x 24cm



# ONBWUR 50

## Cover for high boots with anti-slip sole

### Properties

- Made of barrier material - non-woven fabric laminated with (MPFL) microporous film 65g/m2


**External layer:** polyethylene film

**Inner layer:** non-woven polypropylene

- Anti-slip sole 530g/m2
- Elastic legs to fit the leg
- Straps to prevent slipping - increasing comfort of use
- Colour: white



The bottom of the sole with an additional anti-slip layer



## Technical data of the coveralls

		ACHIEVED PERFORMANCE LEVELS						
Tests		Standards	Type/Class	C110	C210	C250	C310	
Protection type	Limited protective performance against light spray, liquid aerosol or low pressure, low volume splashes and infective agents	EN 13034	Type	6	6B	6B	6B	
	Protection against airborne solid particulates and infective agents	EN ISO 13982-1	Type	5	5B	5B	5B	
	Protective performance against spray and infective agents	EN 14605	Type	-	-	-	4B	
	Total Inward Leakage	EN 1073-2	Class	1	2	1	2	
Protection against infective / infective agents	Pressure test, resistance to blood and body fluid penetration using synthetic blood	EN 14126	Class	-	6	6*	6	
	Resistance to penetration of pathogens from the blood with the use of bacteriophages (Fag Fi-X174) (resistance to the penetration of viruses)	EN 14126	Class	-	6	-	6	
	Resistance to penetration by infective agents due to mechanical contact with substances containing contaminated liquids	EN 14126	Class	-	6	6*	6	
	Resistance to penetration by contaminated liquid aerosols	EN 14126	Class	-	3	3*	3	
	Resistance to penetration by contaminated solid particles	EN 14126	Class	-	3	3*	3	
	Cytotoxicity study			-	It is not cytotoxic	-	It is not cytotoxic	

\*Only on microporous fabric

Sizes	Height	Circuit
S	164-170	84-92
M	170-176	92-100
L	176-182	100-108
XL	182-188	108-117
XXL	189-194	116-124
XXXL	194-200	124-132

Logistical details	C110	C110B	C210	C250	C310	OxyLac	KPP30
Number of suits per box	50 pcs.	50 pcs.	50 pcs.	50 pcs.	50 pcs.	50 pcs.	50 pcs.
Number of suits per pallet	950 pcs.	950 pcs.	1000 pcs.	1000 pcs.	1000 pcs.	1200 pcs.	-
Number of cartons per pallet	19 pcs.	19 pcs.	20 pcs.	20 pcs.	20 pcs.	24 pcs.	-
Weight of carton	10,6 kg	10,6 kg	12,8 kg	10,6 kg	13 kg	10 kg	-
Size of carton	48x28x62cm	48x28x62cm	48x28x54cm	48x28x56cm	48x28x60cm	48x28x46cm	48x28x37cm

## NOTES



**Oxyline Sp.z o.o.**  
95-200 Pabianice, Poland  
ul. Piłsudskiego 23  
tel.: +48 42 215 10 68  
e-mail: oxyline@oxyline.eu

**more than safety**



[www.oxyline.eu](http://www.oxyline.eu)