




TECHNICAL SHEET FA 20 400 30

WIRE ROPE RETRACTABLE FALL ARRESTER, LENGTH 30 M



Olympie

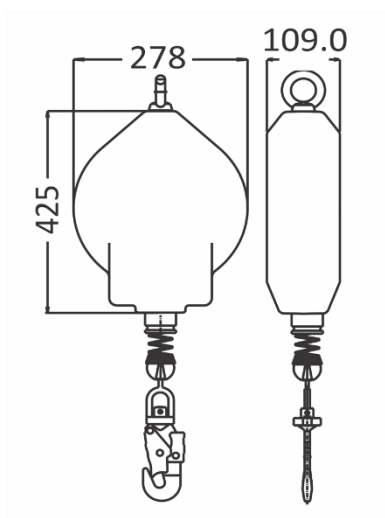

- Comes with Galvanized Steel Wire Rope of diam. 4.5 mm.
- Casing made up of high impact strength Polymer, to prevent breakage.
- Handle with special grip for a perfect comfort during carrying.
- Swivel at the top and at the bottom of the device.
- Internal braking mechanism to reduce the fall arrest force to less than 6kN.

Minimum breaking strength > 12 kN.

Connectors: Swivel and FA 50 101 17 at anchorage end, FA 50 203 20 with load indicator at attachment end.

Average locking speed : 1.7 m/s

Maxi weight for horizontal use (with FA 40 304 15 only): 100 kg.

Maxi weight for vertical use : 140 kg.

Compliance: EN 360:2002.

Tested and approved for horizontal use with the extra lanyard FA 40 304 15.

Material of components:

Protective casing: PA 6 30% fiberglass

Wire rope: Galvanized steel

Connectors: Steel

Length :	CE	Weight :
30 m		12.75 kg

KRATOS SAFETY
689 Chemin du Buclay
38540 HEYRIEUX – FRANCE

Tel : +33 (0)4 72 48 78 27
Fax : +33 (0)4 72 48 58 32

www.kratossafety.com / info@kratossafety.com

HS CODE
8428 90 90
CARTON SIZE / PIECES
80 x 40 x 24 cm / 2
AET N°5158 I2 E1
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
ARTICLE 11 GB07/73551
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom