

Fig. 1


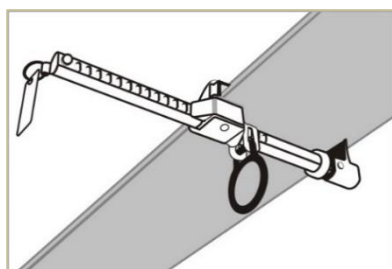


Fig. 2

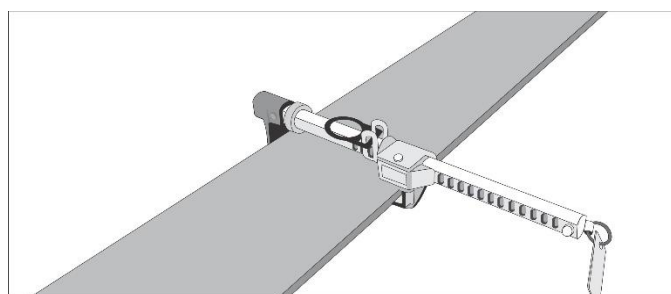

| | | |
|--------------|-----------|---------|
| Length : | CE | Weight: |
| 75 to 150 mm | | 1.60 kg |

KRATOS SAFETY

689 Chemin du Buclay
38540 Heyrieux (France)

Tel. : +33 (0)4 72 48 78 27

Fax. : +33 (0)4 72 48 58 32

www.kratossafety.com / info@kratossafety.com

Beam Anchor

Attachment on steel D-Ring (inside diameter: 55 mm).

Dimensions: Designed to be installed on beams whose width is between 75 mm and 150 mm.

| | Dimensions |
|---|-------------|
| a | Diam. 25 mm |
| b | 32 mm |
| c | 19 mm |
| d | 35 mm |
| e | 49 mm |
| f | 98 mm |

Minimum breaking strength > 23 kN

Compliance: EN795:2012 Type B.

Fig. 1 - Standard use:

Anchoring at the underside of the metal beam.

Fig. 2 - Possible use:

Anchoring on top of the metal beam.

Materials:

Aluminium, brass and steel.

HS CODE

83081010

CARTON SIZE / PIECES

60 x 40 x 24 cm / 15

AET N°5744 I2 E1

Satra Technology Centre, N°0321

Wyndham Way, Telford Way, Kettering
Northamptonshire, NN16 8SD, United Kingdom

ARTICLE 11 GB07/73551**SGS United Kingdom Ltd., N°0120**

Unit 202B, Worle Parkway,
Weston-super-Mare, BS22 6WA, United Kingdom